

BRISTAN

WMNT 5 C & WMNT9 C

Installation Instructions & User Guide



Please keep these instructions for future reference and request of replacement parts

Important Safety Information

- Please read these instructions thoroughly and retain for future use.
- All products manufactured and supplied by Bristan are safe provided they are installed correctly, used correctly and receive regular maintenance in accordance with these instructions.
- **If you are in any doubt about your ability to install this product safely you must employ the services of an experienced qualified plumber.**
- Remove all packaging and check the components for damage before starting installation.
-  Before starting any installation please consider the following: Prior to drilling into walls, check that there are no hidden electrical wires, cables or water supply pipes. This can be checked with the aid of an electronic detector.
- If power tools are used do not forget to:
 - Wear eye protection
 - Unplug equipment after use
- This product **must** not be modified in any way as this will invalidate the guarantee.
- These fittings need to be installed in accordance with and meet the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

Installation

1. Identify all components are present prior to starting installation.
2. This wall mount fixing kit has pipe centres of either 110mm, 130mm or 150mm see Fig. 1 overleaf.
3. Secure the mounting plate to the internal wall or studding using suitable fixings (not supplied) using a spacing batten if required.
4. Connect the hot and cold water supplies to the spigot inlets using 15mm copper pipework and securely tighten using the 15mm compression nut and olives.


NOTE: The supply pipework is normally installed with the hot supply on the left and cold supply on the right when viewed from the front.

5. Mark out the position of the spigots onto the plaster board and cut two holes ensuring the shroud will cover the hole when fitted.
6. Finish the wall surface ensuring the spigots protrude through the wall surface and push the shrouds onto the spigots.


NOTE: A small bead of silicon sealant may be required where the spigot protrudes out of the wall surface to create a water tight seal.

7. Fit the Mixer shower (not supplied) to the wall mount kit. See the installation instructions of the mixer shower for full installation of the mixer shower.


Dimensions

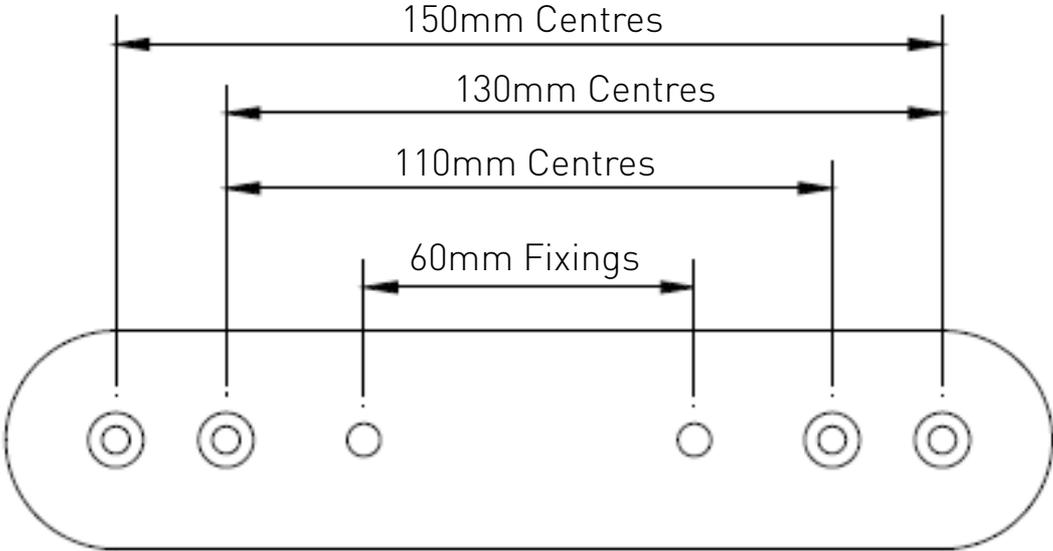

WMNT5 C

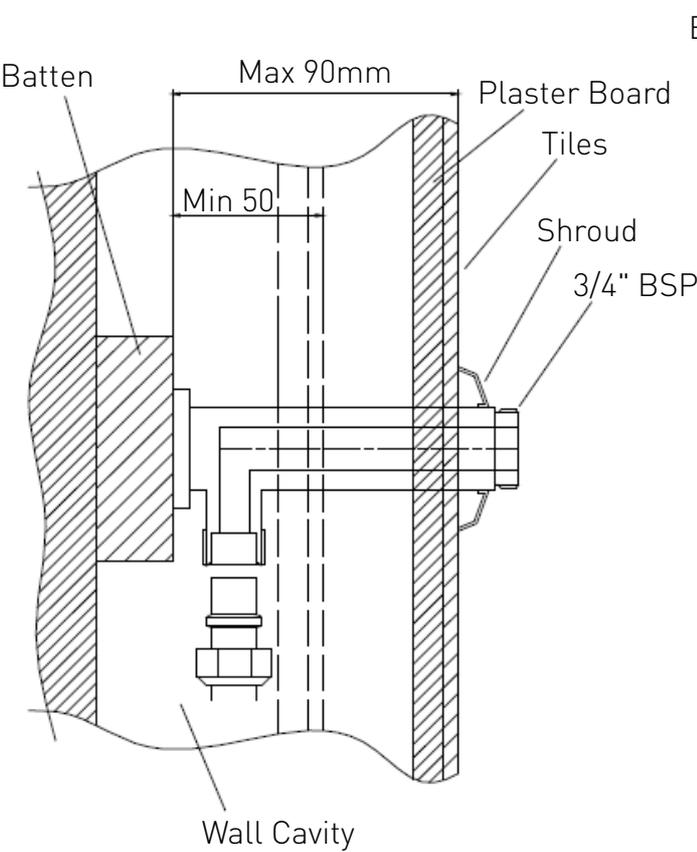

WMNT9 C

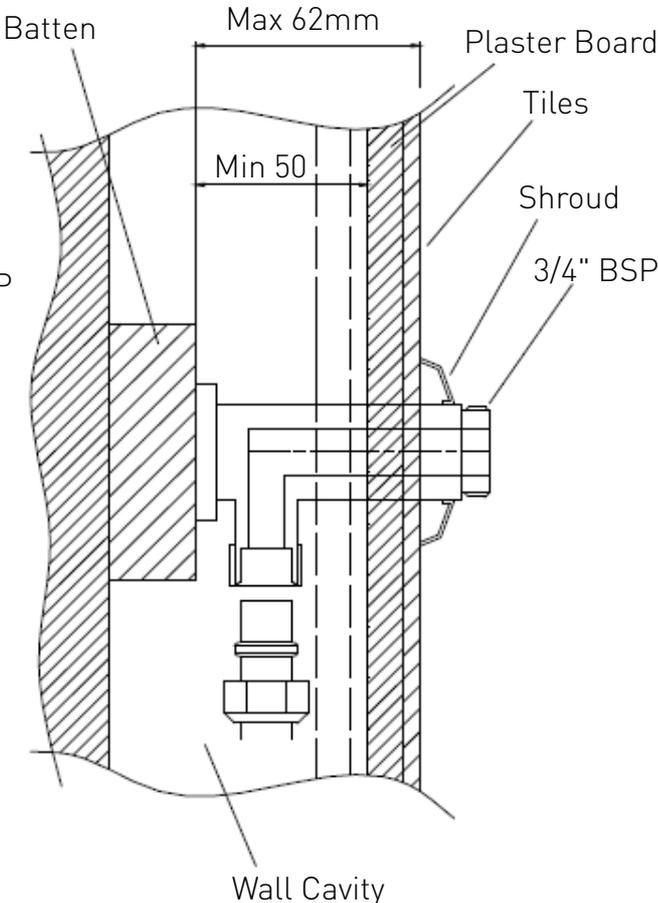

Bristan Guarantee

Bristan offers solid guarantees to provide you with complete peace of mind.

Mixer Shower Valves

5 year parts. 5 year labour* (subject to registration), or 1 year with proof of purchase.

Gold, painted and special finishes 3 years parts only.

Accessories

5 year parts only. Includes bathrooms accessories, shower accessories (e.g. hoses, handsets and poles), wastes, WC levers and light pulls. Gold, painted and special finishes 3 years parts only.

*Labour provided by an approved Bristan engineer. Guarantee only applies to products with a manufacturing fault. A deferred payment will be necessary in order to secure any visits by our engineers which will be charged if the problem is found **not** to be a manufacturing fault. If the fault is found to be down to a manufacturing error, the payment will be released and not charged.

This guarantee applies to products purchased within the United Kingdom or Republic of Ireland, but does not apply to products used commercially.

The guarantee is only available to original purchasers who have proof of purchase.

The installation must allow ready access to all products for the purpose of inspection, maintenance or replacement.

Any part found to be defective during the above guarantee period will be replaced without charge, providing that the product has been installed in accordance with the instructions, used as intended, and regularly serviced.

Servicing should be carried out at regular intervals of no more than 12 months and more frequently in hard water areas (heavy lime scale) areas.

In the unlikely event that any problems are encountered with the product's performance on installation, you must obtain guidance/authorisation from our Customer Service Department, and be able to supply proof and date of purchase, before any remedial action is taken.

The guarantee excludes general wear and tear and damage caused by accident, misuse or neglect, and does not cover the following:

- Components that are subject to general wear and tear such as filters, seals, 'O' rings and washers etc.
- Damage caused by faulty installation
- Damage caused by lime scale or any waterborne debris
- Damage caused by inappropriate cleaning products (see user instructions)
- Damage caused by the use of non-Bristan parts
- The product being used for a purpose other than intended by the manufacturer.

In the interests of continuous product improvement Bristan reserves the right to alter specification as necessary.



Guarantee

Helpline

0844 701 6273

This booklet covers product codes: WMNT5 C, WMNT9 C

Bristan Group Limited

Birch Coppice Business Park, Dordon, Tamworth, Staffordshire B78 1SG

A Masco Company

Website: www.bristan.com

Email: enquire@bristan.com

Telephone: 0844 7016 274

Facsimile: 0844 701 6275