

# Z TC 1/2 C

## COMMERCIAL Tap Range Timed Flow Temperature Control Basin Mixer Tap



### Features:

- Temperature control push button mechanism
- Max temperature limiter (adjustable) for user safety
- Vandal resistant 'release to activate' mechanism
- Timed shut -off to meet BS EN 816
- Supplied with 6 L/min flow regulator fitted

### Product Certifications:



WRAS Certificate No: 2111384  
WRAS Expiry Date: 30/11/2026




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Commercial Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Soft Close
Connection Inlet:	15mm Compression Flexible Tails
Connection Outlet:	M24 Aerator
Number of Tap Holes:	1
Valve/Cartridge Type:	Temperature Control Cartridge
Plumbing System Requirements:	Suitable for high pressure systems
Minimum Dynamic Pressure (bar):	1 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	Yes

### Dimensions (measurements in mm)

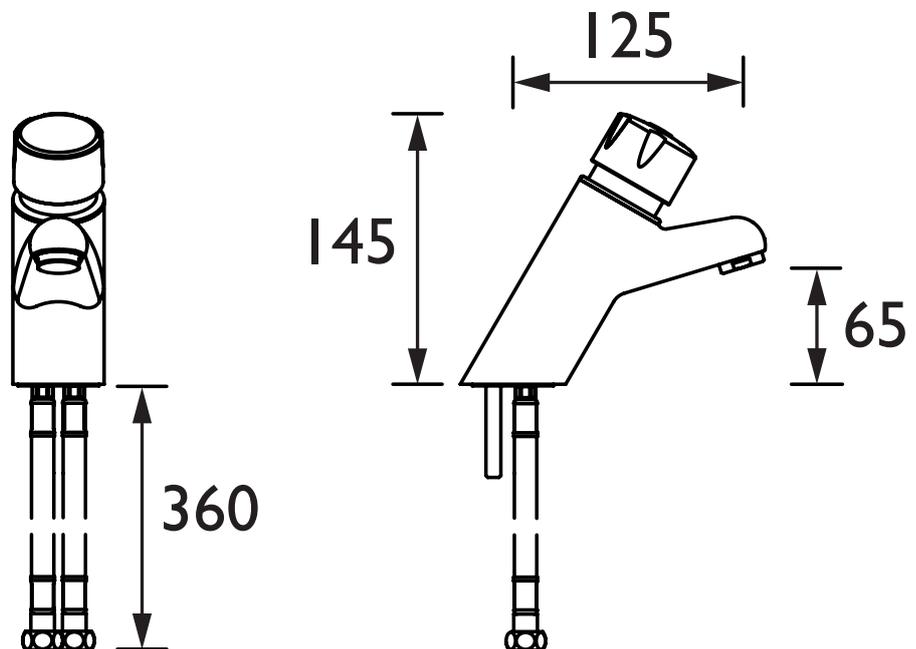

### Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
Z TC 1/2 C (mixed)	3.3	4.7	5.7	5.3	7.4

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D6