

VR3000FF DUCT


Accessories Vandal Resistant Adjustable Fast Fit Duct Showerhead



Specification

Main Construction Material:	Brass
Connection Inlet:	15mm
Connection Outlet:	N/A
Product Type:	Commercial
Working Pressure Range:	Dependent upon shower valve/mixing valve specified
Finish:	Chrome
Plumbing System Requirements:	Suitable for all plumbing systems

Dimensions (measurements in mm)

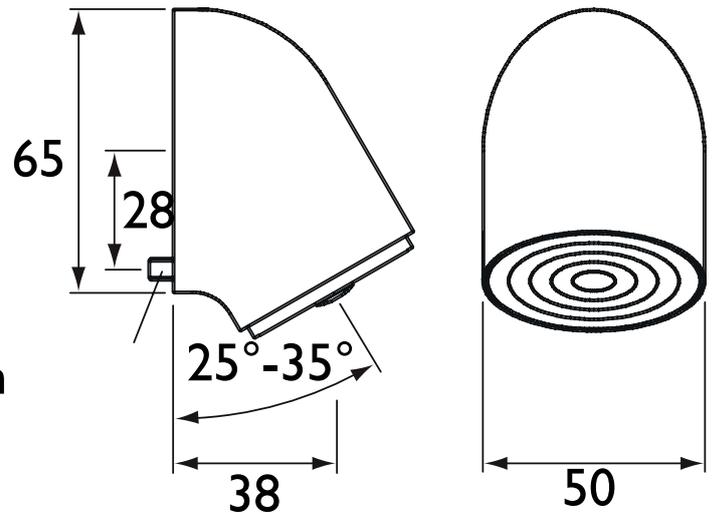

5mm
Anti-Rotation
Pin

Features:

- Robust construction for duct mounting in high risk areas
- Inlet tail can be cut to suit different cavity depths through wall thickness from 1 - 125mm
- Anti-grip curved design with tamperproof fixings and anti-rotation system
- Easy to install, fast-fit external connections
- Interchangeable spray rings and adjustable spray angle 25°-35°
- 15mm inlet connection

Product Certifications:



WRAS Cert. Number: 2006909
WRAS Expiry Date: 30/06/2025

For more products, visit our website:
<http://www.bristan.com>



TECHNICAL
DATA
SHEET



BRISTAN

D4