



Features:

- Allows water to divert from rigid riser to shower handset
- Single handle operation
- Must be supported by rigid pipework/shower valve
- Chrome plated to BS EN 248

Product Certifications:


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	0.5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	65
Connection Inlet:	G 1/2" BSP
Connection Outlet:	15mm Compression
Check Valve Included:	N
What's Included:	1 x Diverter, 1 x Fibre Washer, 1 x Fitting Instructions

Dimensions (measurements in mm)

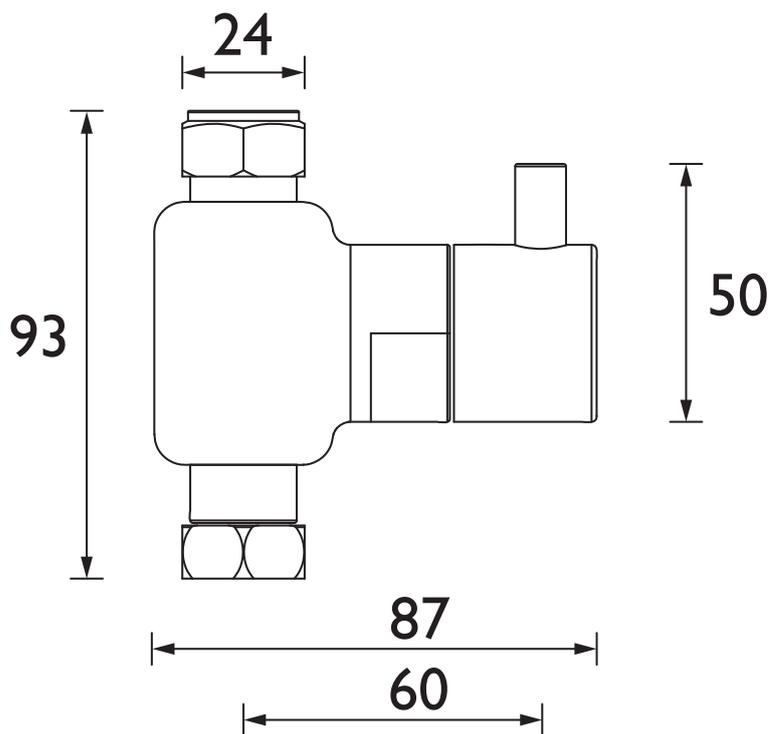

TECHNICAL
DATA
SHEET



BRISTAN