

# MT503CP

## GUM Shower Range 15mm Thermostatic Mixing Valve



### Features:

- Automatic shut off in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Operates at a maximum pressure differential of 10:1
- High pressure bath fill Part G compliant

### Product Certifications:



WRAS Certificate No: 2303901  
WRAS Expiry Date: 31/03/2028



TMV3 Certificate No: NSF2584/0223  
TMV3 Expiry Date: 20/02/2028


For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Mixing Valve
Main Construction Material:	Brass
Mount Type:	Wall
Shower Type:	Thermostatic Mixing
Connection Inlet:	15mm
Connection Outlet:	15mm
Valve/Cartridge Type:	Thermostatic
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.1 Bar
Maximum Dynamic Pressure (bar):	5.0 Bar
Maximum Hot Water Supply Temperature °C:	80
Maximum Static Pressure (bar):	10 Bar
Flow Type	Single Flow
Isolation Valve Included:	Yes
Check Valve Included:	Yes

### Dimensions (measurements in mm)

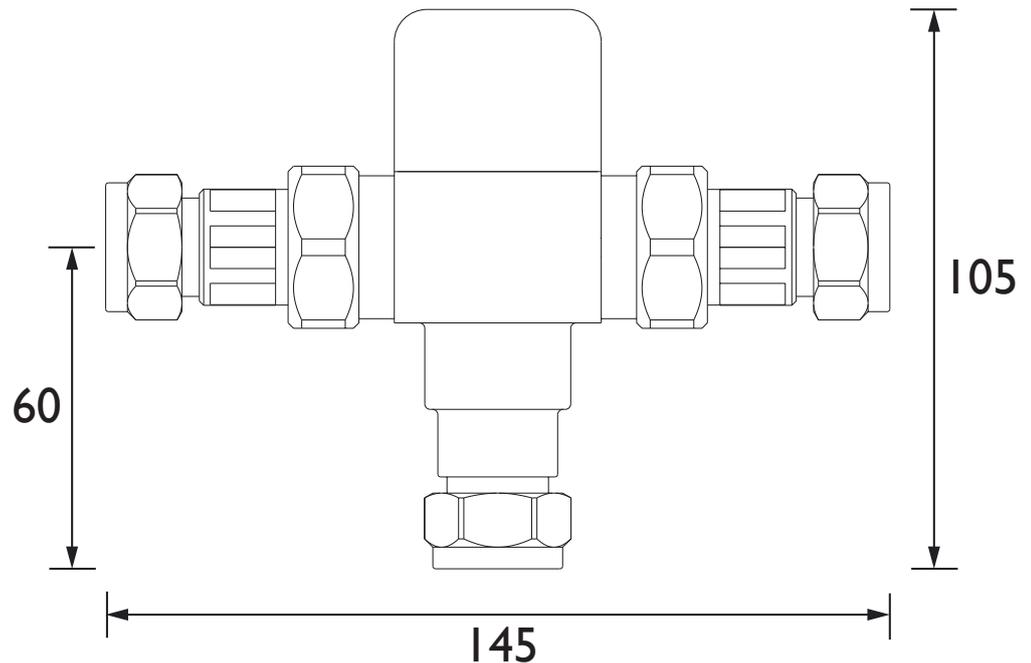

### Flow Rates (l/min)

System Pressure (bar)	0.1	0.2	1	2	3	5
MT503CP	6	8.5	21.5	31	32.9	42.5

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D9