

PM2 SQSHXAR C

PRISM Shower Range Prism Exposed Sequential Chrome Shower Valve with Adjustable Riser Kit



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes riser rail with adjustable fixing bracket, rub-clean anti-limescale handset and hose

Product Certifications:



WRAS Cert. Number: 2205903
WRAS Expiry Date: 31/05/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Bar Shower
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5.0
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	1/2"
Isolation Valve Included:	N
Check Valve Included:	N

Dimensions (measurements in mm)

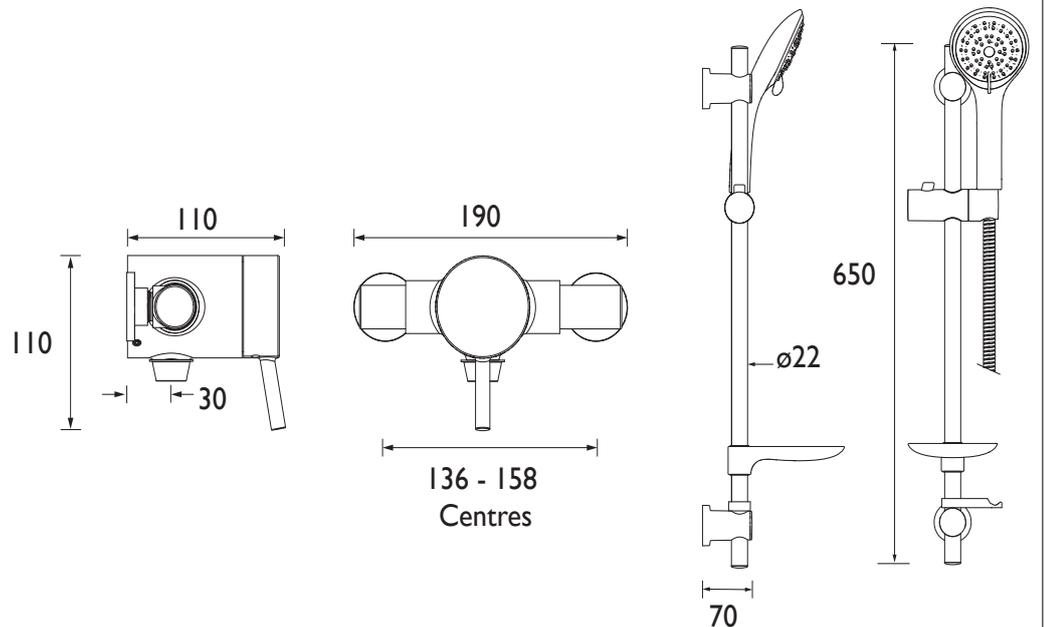

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	2.4	5.5	7.7	10.9	13.4	17.3
Through Handset (mixed)	2.4	5.5	7.7	10.9	13.4	17.3
With Flow Limiters (mixed)		6.5	9.7	13.7	13.4	12.3

TECHNICAL DATA SHEET



BRISTAN

D3