

Logis

Single lever shower mixer for exposed installation with 2 flow rates

Finish: **Chrome** Article Number: **71601000**



Description

product features

- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 12,4 l/min
- flow rate of hand shower at 3 bar: 12,4 l/min
- ceramic cartridge with Eco handle position for a reduced flowrate by up to 50%
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections

Technology




Certificates / Sustainability




Product image



Scale drawing

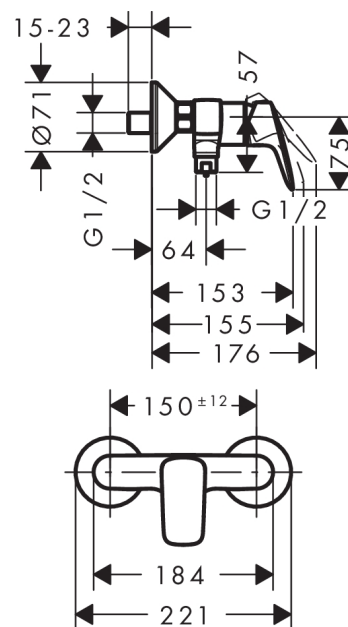

Flowchart



- ① Shower outlet 1B-resistance ECO
- ② Shower outlet with 1B-resistance

Logis


Single lever shower mixer for exposed installation with 2 flow rates

Finish: **Chrome** Article Number: **71601000**



Exploded Drawing

Year of production: >04/14

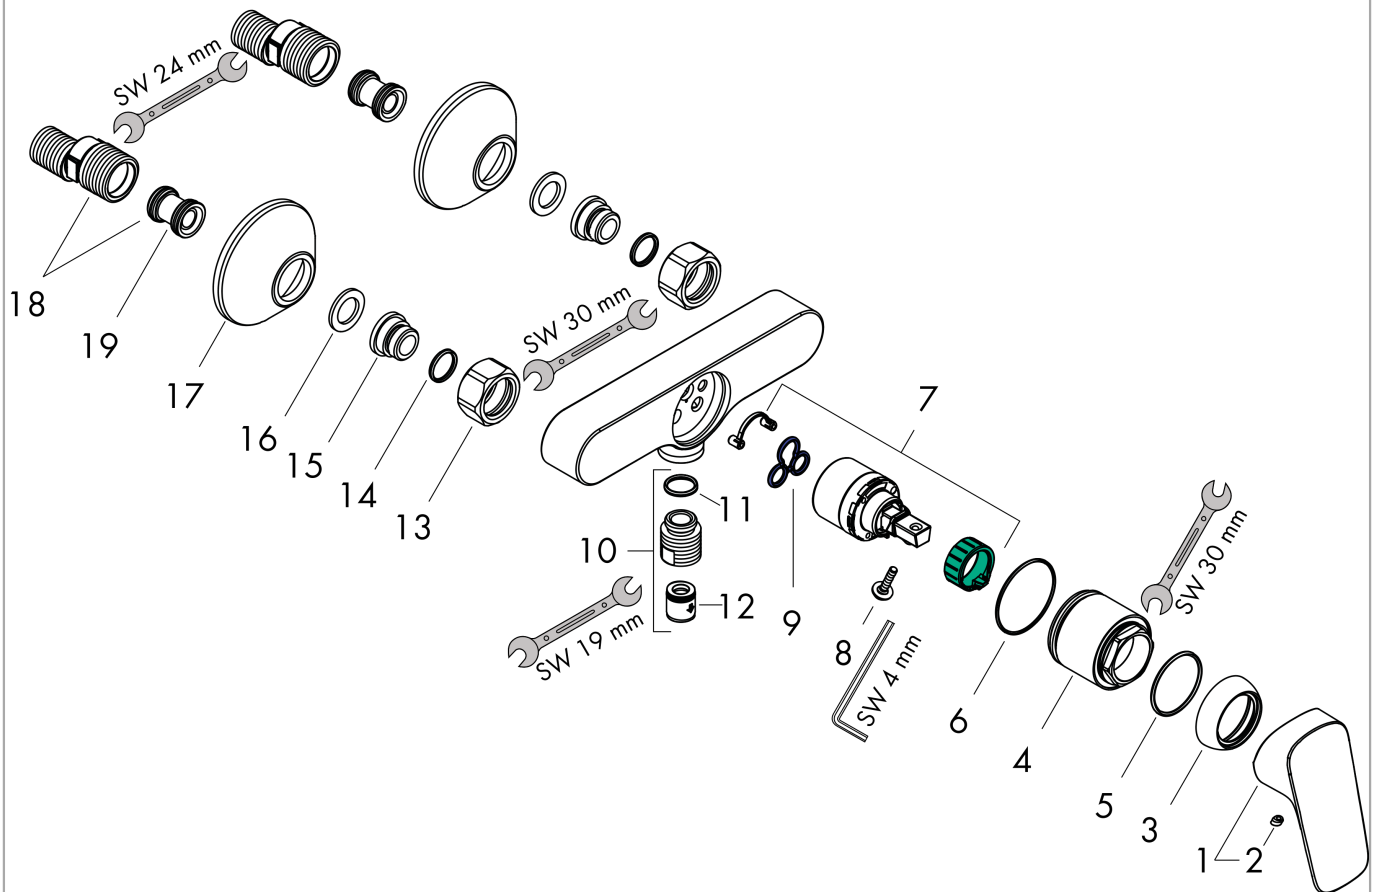

Logis

Single lever shower mixer for exposed installation with 2 flow rates

Finish: **Chrome** Article Number: **71601000**



Spare part list

Year of production: >04/14

Pos.	Description	Article Number	PC	PU
1	handle	92224000	10	1
2	screw cover	96338000	1	1
3	flange	97406000	6	1
4	nut	97977000	9	1
5	O-ring 33x1,5	98164000	1	1
6	O-Ring 32x2	98193000	1	1
7	cartridge, assy	95730000	9	1
8	locking screw for handle	95140000	2	1
9	seal	95008000	3	1
10	Hose Connection	96044000	7	1
11	O-ring 14x2	98129000	1	1
12	set of non return valves DW 15	94074000	5	1
13	set of nuts	96157000	8	1
14	O-ring 15x2	98163000	1	1
15	connecting thread	97220000	5	1
16	filter packing	96922000	3	1
17	escutcheon Ø 70 mm	94135000	4	1
18	set of S-unions (±12 mm)	94140000	10	1
19	noise reduction	96429000	2	1
a	set of S-unions (±32 mm)	98592000	9	1