

ShowerSelect Glass Thermostat HighFlow for concealed installation

Finish: **White/Chrome** Article Number: **15734400**



Description

product features

- thermostat cartridge
- maximum flow rate at 3 bar: 42 l/min
- flow rate upper outlet: 42 l/min
- flow rate lower outlet: 42 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- connection type: basic set
- dirt filter included

Technology




Certificates / Sustainability




Product image



Scale drawing

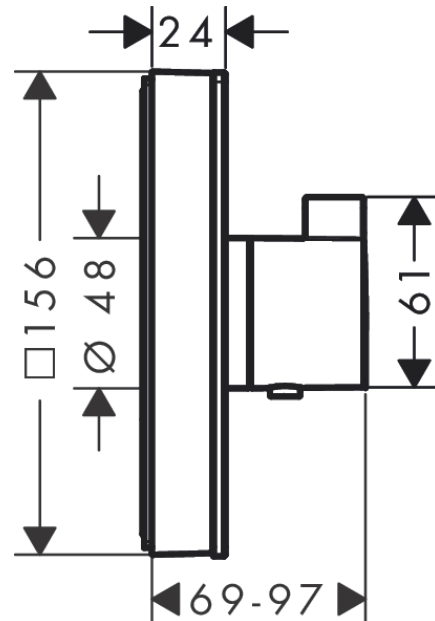

Flowchart

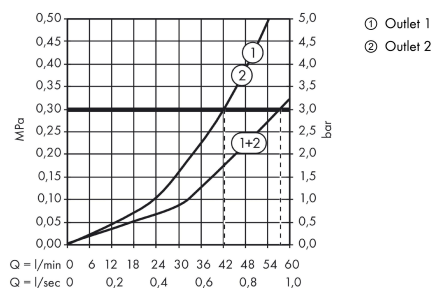


ShowerSelect Glass
Thermostat HighFlow for concealed installation
 Finish: **White/Chrome** Article Number: **15734400**



Exploded Drawing

Year of production: >08/16

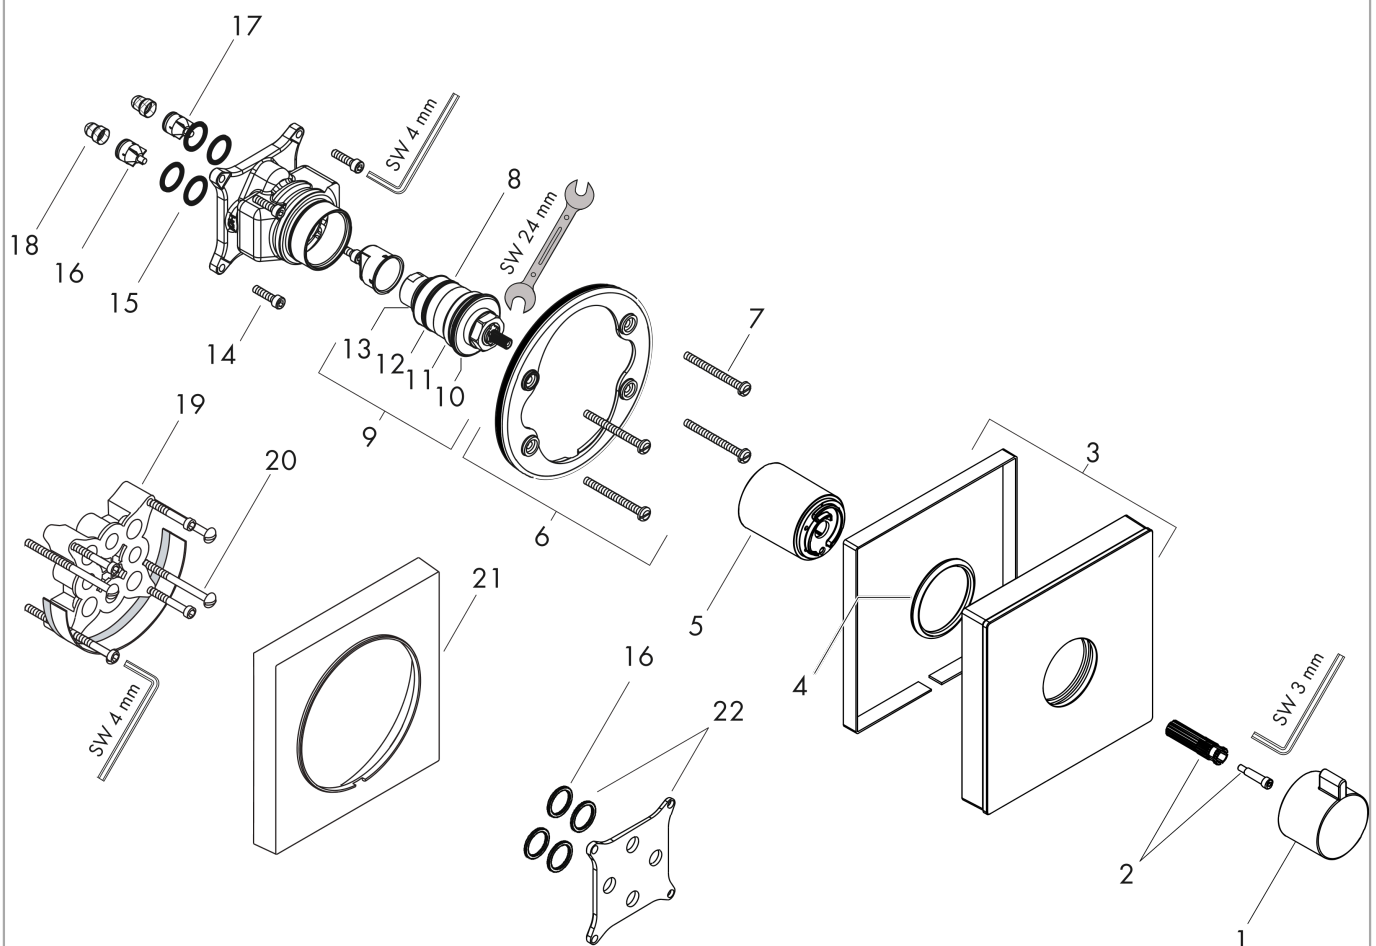

ShowerSelect Glass
Thermostat HighFlow for concealed installation
 Finish: **White/Chrome** Article Number: **15734400**



Spare part list

Year of production: >08/16

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	92596000	13	1
2	adapter for handle	92597000	7	1
3	escutcheon 155 / 155 mm	92595400	16	1
4	O-ring 48x5	98174000	1	1
5	sleeve	92867000	9	1
6	holder for escutcheon	98793000	9	1
7	set of fixing screws	96454000	3	1
8	thermostat cartridge	96633000	15	1
9	sealing set	96636000	10	1
10	O-ring 43x1,5	98148000	1	1
11	O-ring 38x2,5	98198000	2	1
12	O-ring 34x2	98383000	2	1
13	O-ring 26x2	98147000	1	1
14	set of screws	96525000	3	1
15	O-ring 16x2	98133000	1	1
16	non return valve (pressure-resistant up to 2 MPa)	93444000	8	1
17	set of non return valves DW 15	97350000	6	1
18	filter	98513000	1	1
19	extension 25 mm	13595000	99	1
20	set of fixing screws	97747000	1	1
21	extension 22 mm	13604000	99	1
22	compensation set 1°	95521000	16	1
a	concealed item	01800180	99	1
b	adapter for exchanged connections	93181000	18	1
c	Grease	90920000	5	1