

ShowerTablet Select

Shower thermostat 400 for exposed installation

Finish: **Matt Black** Art. no. : **24360670**



Description

product features

- designed to run 1 outlet
- temperature and volume control
- Select push-button on / off control for 1 outlet
- hand shower holder integrated in the shelf
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- Maximum flow rate (at 3 bar): 16.3 l/min
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- Safety stop at 40°C
- Maximum temperature can be adjusted on installation
- with isolated water conduction
- Non-return valve
- shelf made of plastic
- Shelf colour: graphite
- Material handles: plastic
- Centre distance: 150 mm ± 12 mm
- Connection type: S connections, 1/2"
- dirt filter included
- thermostat is delivered with button hand shower
- if running with a pump, please specify a universal (negative head) pump
- Noise class: I
- WRAS 2310358
- WRAS 2310358 - WRAS approval letter 2310358

Article Details

Price excl. VAT

£ 554.20

Technology



Design awards



reddot winner 2021




Certificates / Sustainability



Product image




Scale drawing

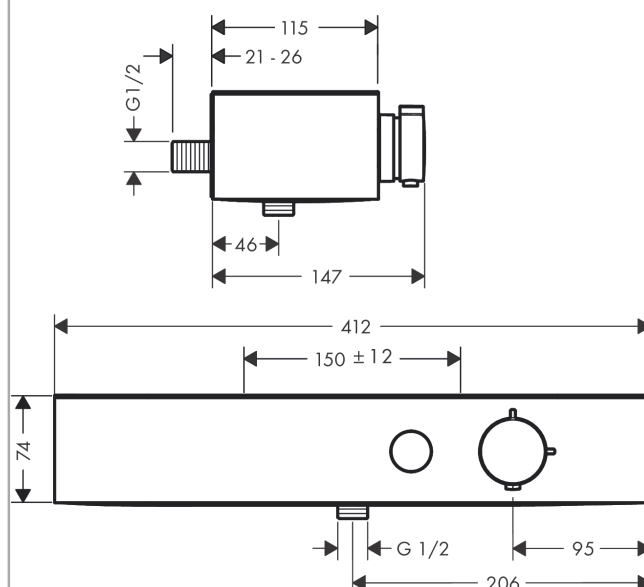

ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Matt Black** Art. no. : **24360670**



Flowchart




ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Matt Black** Art. no. : **24360670**



Exploded Drawing

Year of production: >10/21

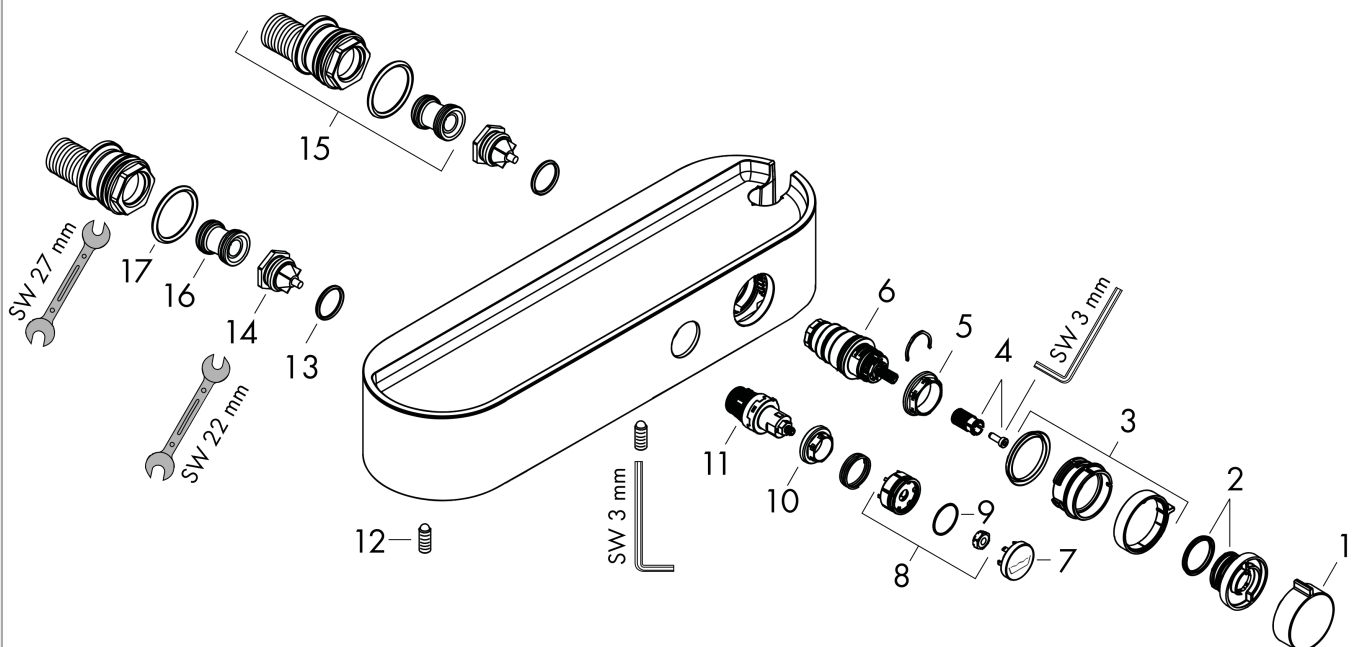

ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Matt Black** Art. no. : **24360670**



Spare part list

Year of production: >10/21

Pos.	Description	Art. no.	Price	PU
1	handle	94403670	-	1
2	safety set	94404000	-	1
3	handle	94405670	-	1
4	handle fixing set	92136000	-	1
5	nut	98368000	-	1
6	thermostat cartridge	98282000	-	1
7	set of symbols	98367670	-	1
8	spring with sleeve	92340000	-	1
9	O-ring 20x1	98140000	-	1
10	nut	98913000	-	1
11	shut off unit	95758000	-	1
12	hollow set screw M6x16 including o-ring 29x3	98372000	-	1
13	O-ring 17x2	98199000	-	1
14	non return valve (pressure-resistant up to 2 MPa)	95773000	-	1
15	set of S-unions	95772000	-	1
16	noise reduction	96429000	-	1
17	O-ring 29x3	98371000	-	1
a	cartridge for exchanged connections	92373000	-	1