


Aqua-Dec Easy Fit - Technical Data

Thickness	All 22mm in height
Handing	Universal (not handed)
Waste outlet position	Adjustable, designed to be rotated to avoid joists, pipe work or other obstruction.
Trap Size	200mm aperture in floor former
Waste options	Gravity 50mm water seal (horizontal or vertical options) or pumped waste by selecting the correct trap or pump kit (pump kits available separately)
Sizes Available	800mm x 800mm, 900mm x 900mm, 1000mm x 1000mm, 1200mm x 1200mm, 1200mm x 750mm, 1200mm x 900mm, 1300mm x 800mm, 1400mm x 900mm, 1500mm x 800mm, 1500mm x 1200mm, 1700mm x 750mm, 1850mm x 900mm
Cut to Length (see diagrams page 4)	Can be cut to Length to suit wall to wall measurement or to accommodate soil pipes etc. When cut to length the cut edges must be fitted against a wall and supported on additional noggins or trimmers.
Construction	Rigid GRP (glass fibre and polyester resin) composite with reinforcing ribs in underside to distribute loads evenly.
Features	Unique rotating drain plate allows floor drain to be positioned to avoid joists or other obstructions. 22mm thick for easy installation into conventional timber floors. Consistent gradient (15mm), Preformed countersunk fixing holes, easily cut with a handsaw.
Installation	Can be installed directly onto floor joists (at 400mm centres) with no additional support or bedded into screeded floors.
Supplied with	Floor drain, fixing screws and installation guide (drain options available)
Drainage solutions; for Tiled and Vinyl floor coverings*	<p>Gravity Horizontal outlet (43mm solvent socket outlet) 50mm water seal (standard)</p> <p>Gravity Vertical outlet (43mm solvent socket outlet) 50mm water seal</p> <p>Pumped waste (22mm outlet)</p> <p>Slimline waste (43mm outlet solvent/compression outlet) waterless trap</p> <p><i>*Not all drainage solutions are available with all drain tops.</i></p>
Flow rates l/min (approx, measured using UTT01/H floor drain)	Average Flow rate for all Easy-Fit Decs fitted with tiled drain - 36.3 l/min


Coram UK Holding Ltd reserves the right to change the design or specification without prior notice. All values are approximate.

Aqua-Dec Easy Fit - Features & Sizes

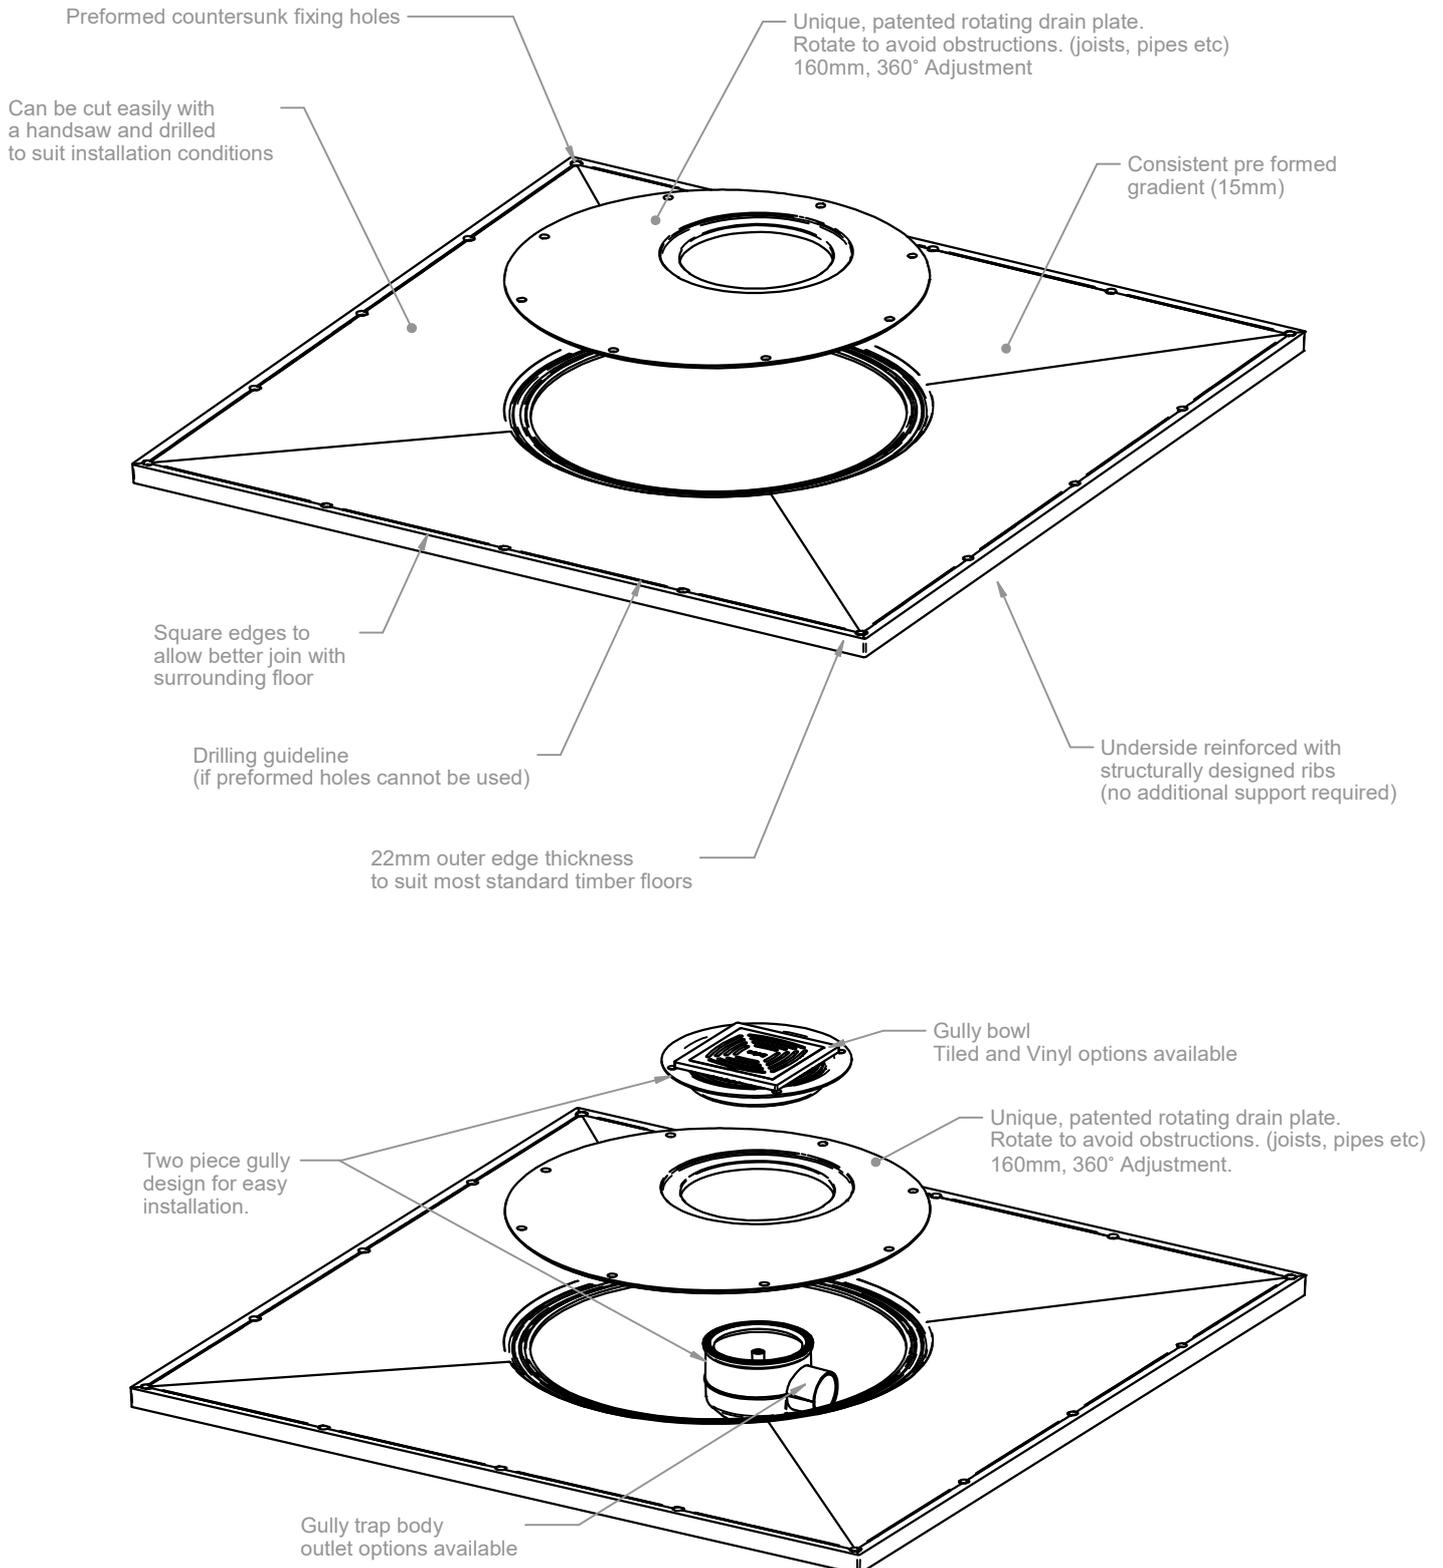


Aqua-Dec Easy Fit - Floor Drain Details

Gravity Horizontal Drain; Ø43mm solvent outlet. 50mm water seal (supplied as standard)

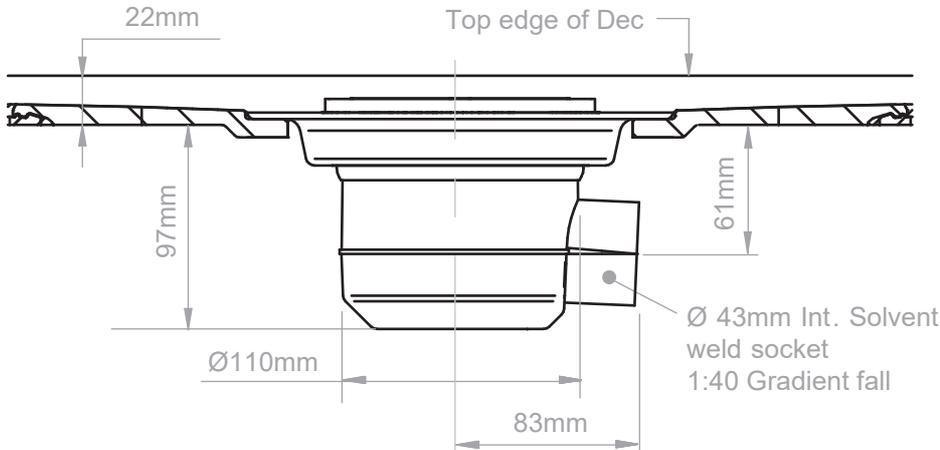


Drain Top Details


Tiled Quad Tops (Slot shown)

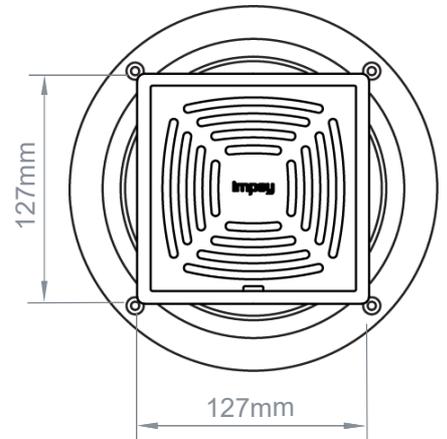


Gravity Vertical Drain; Ø43mm solvent outlet. 50mm water seal

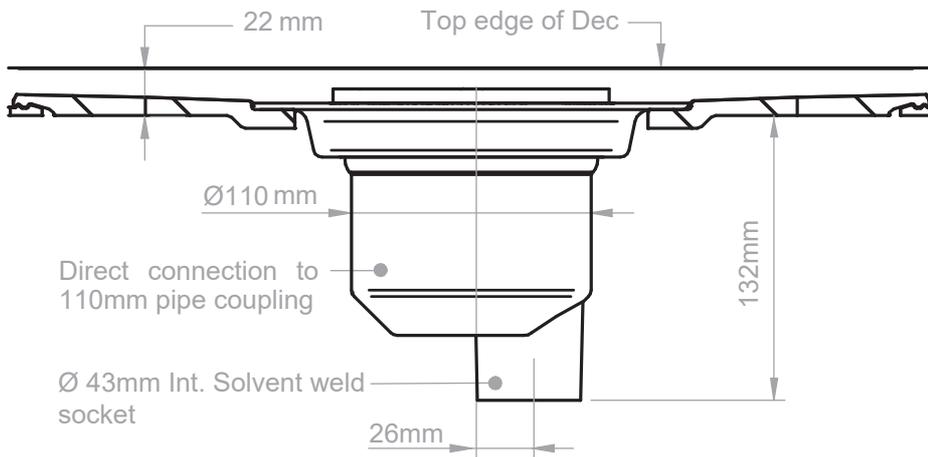


Tiled Insert & Paragon Tops;

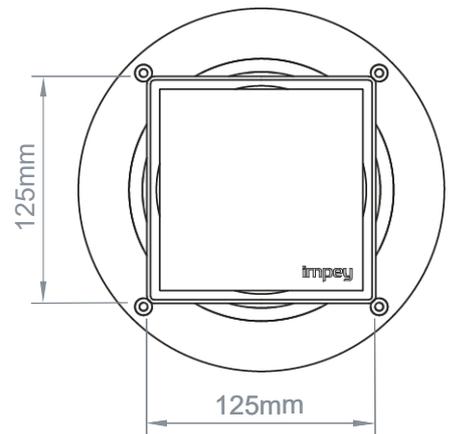


Pumped Drain; 22mm outlet

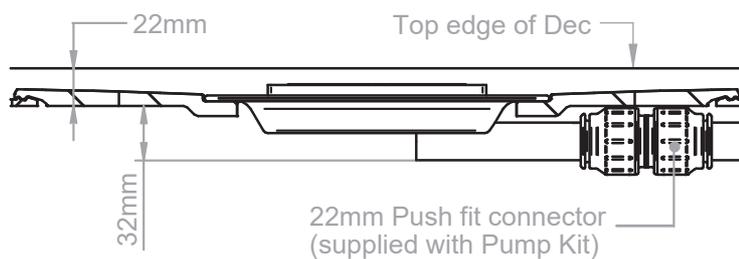


Vinyl Gravity;

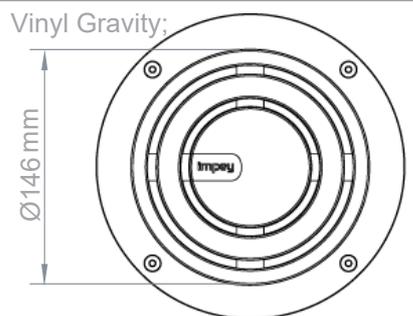

Slimline Drain; Un-trapped waterless floor drain

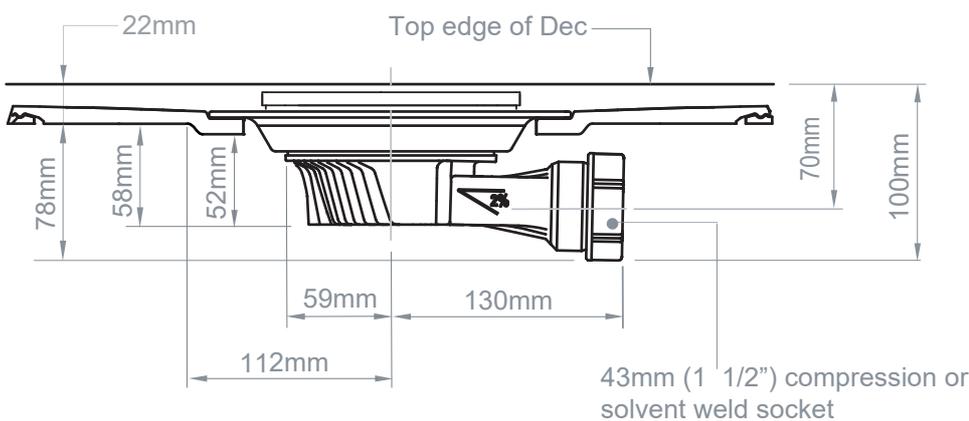

Vinyl Slimline & Pumped Tops;

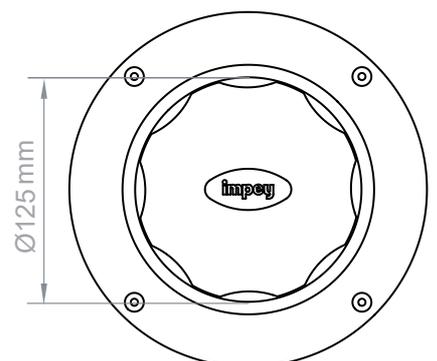

Aqua-Dec Easy Fit - Cutting and Drilling guidelines

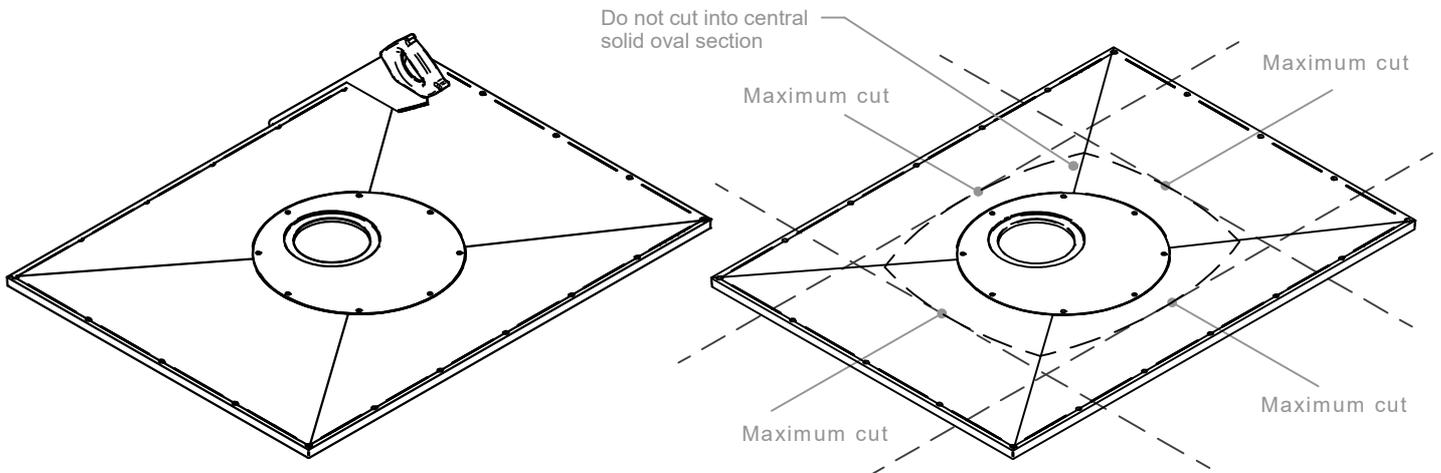


Fig.1
Cut using an old or disposable handsaw.

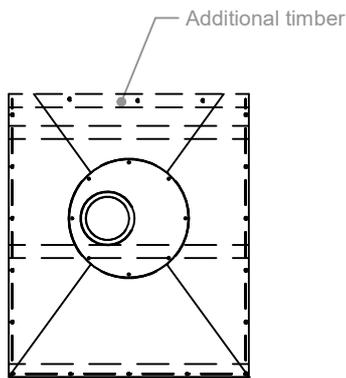


Fig.2
Cut to length.

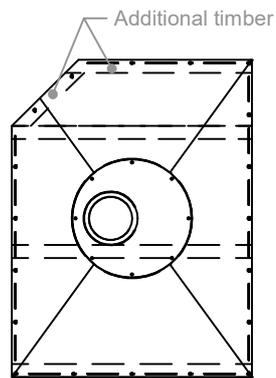


Fig.3
Cut to accommodate diagonal wall.

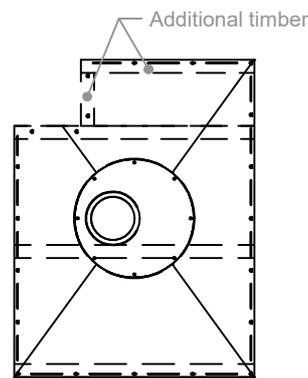


Fig.4
Cut to accommodate drain point.

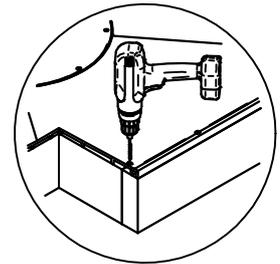


Fig.5
Ensure cut edges are fixed.

Ensure all the cut edges are supported, then drill, countersink and screw the Dec to the joists below in around 200mm intervals (avoiding pipes, electric wires, etc.).
Important: Do not cut the edges that adjoin surrounding floor. Cutting the Dec may reduce flow rate performance.

Additional fixing points



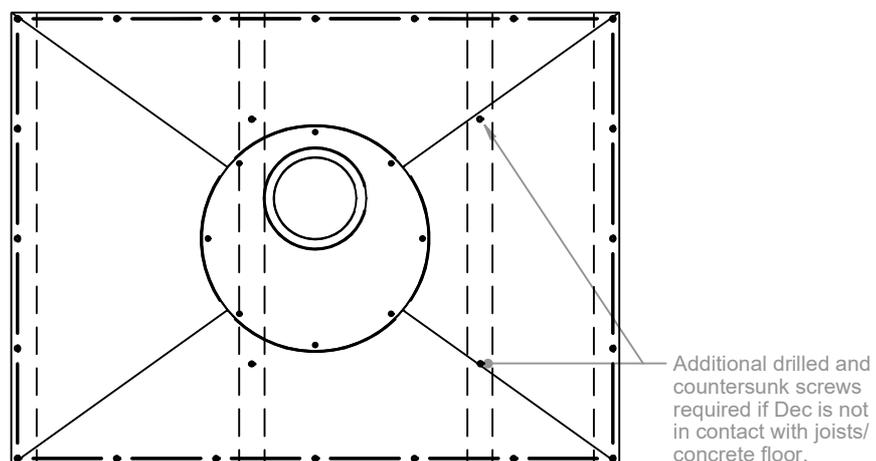


Fig.6
If Dec is not in contact with joist/concrete floor you must drill out and countersink the Dec to ensure it does. Failure to do this will allow unacceptable movement and may cause floor tiles to crack or become loose.

Aqua-Dec Easy Fit - ADE 8080


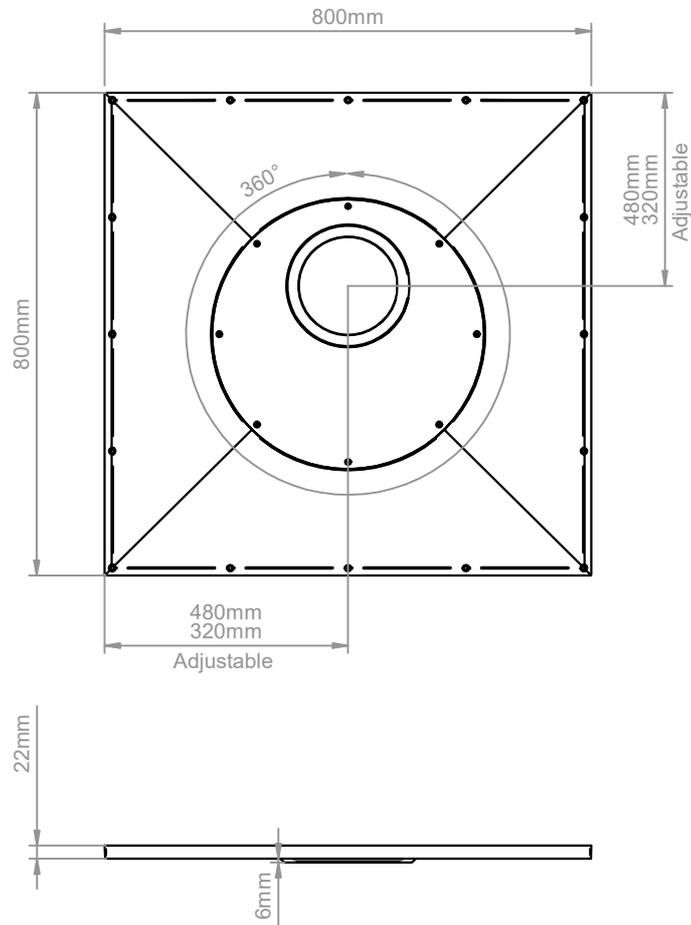


Do not cut into central solid oval section

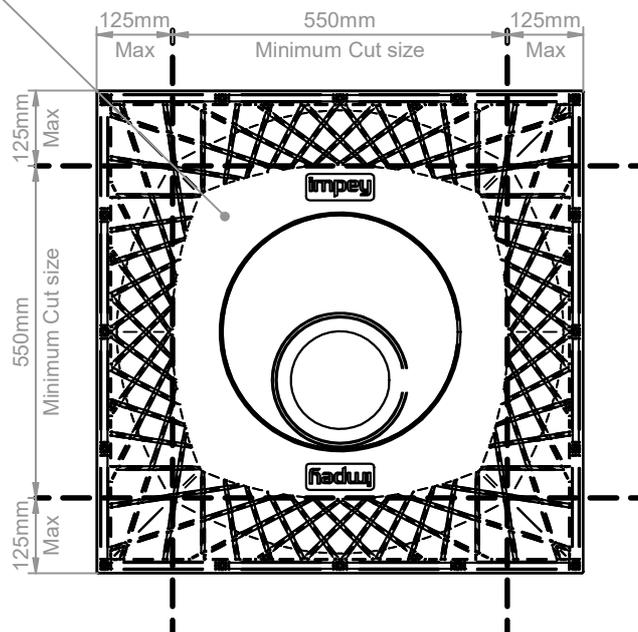


12.5 kg

Aqua-Dec Easy Fit - ADE 9090

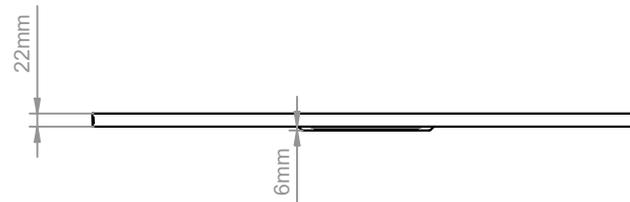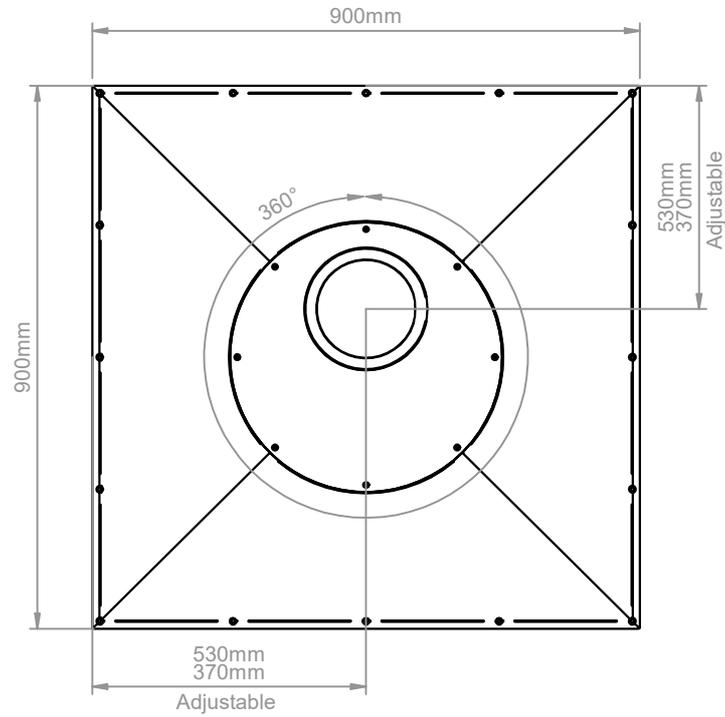


Do not cut into central solid oval section

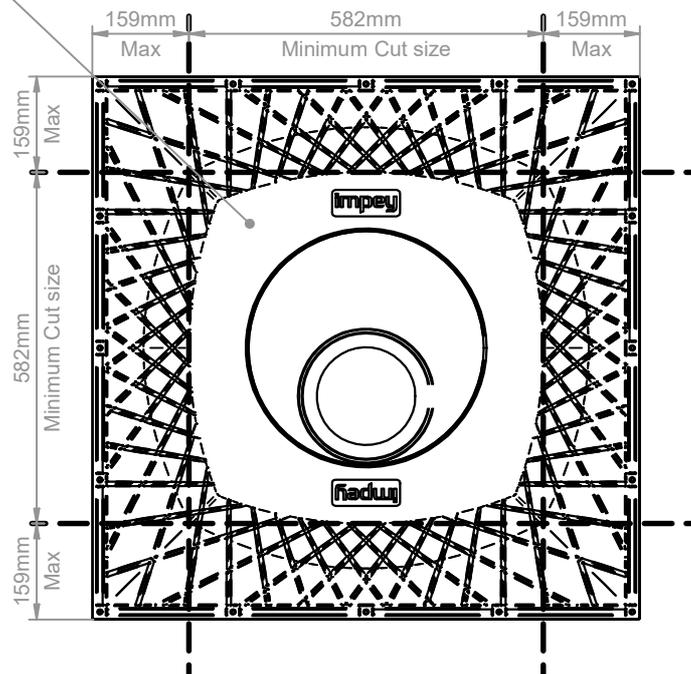


16.3 kg

Aqua-Dec Easy Fit - ADE 1010

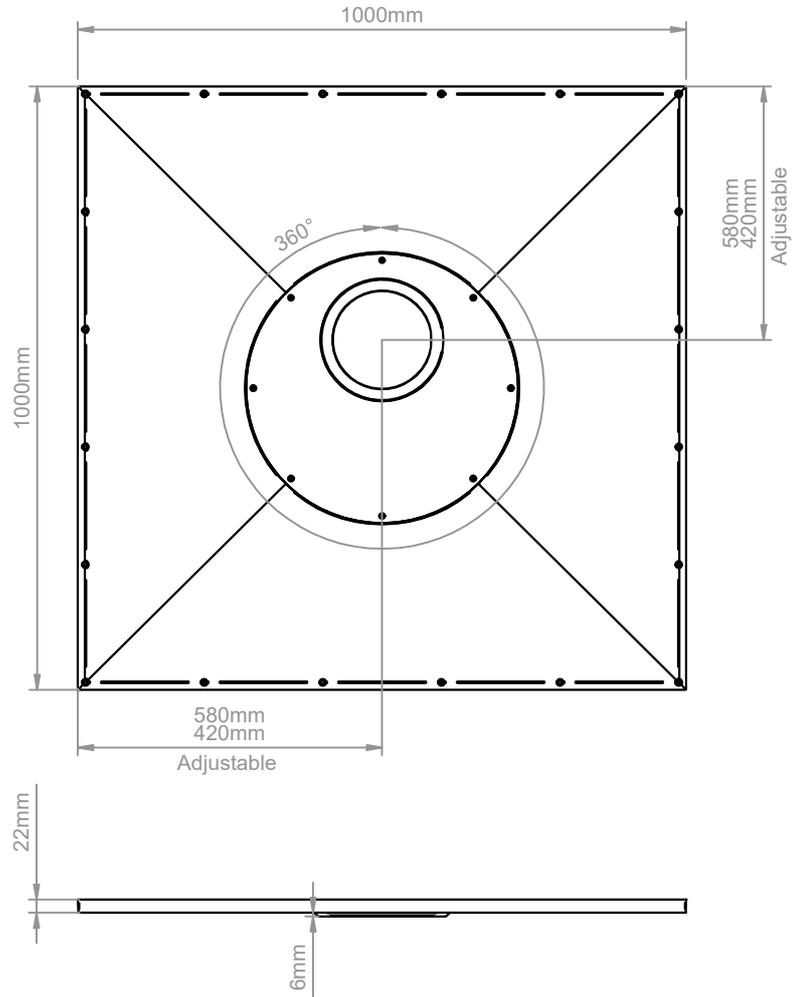


Do not cut into central solid oval section

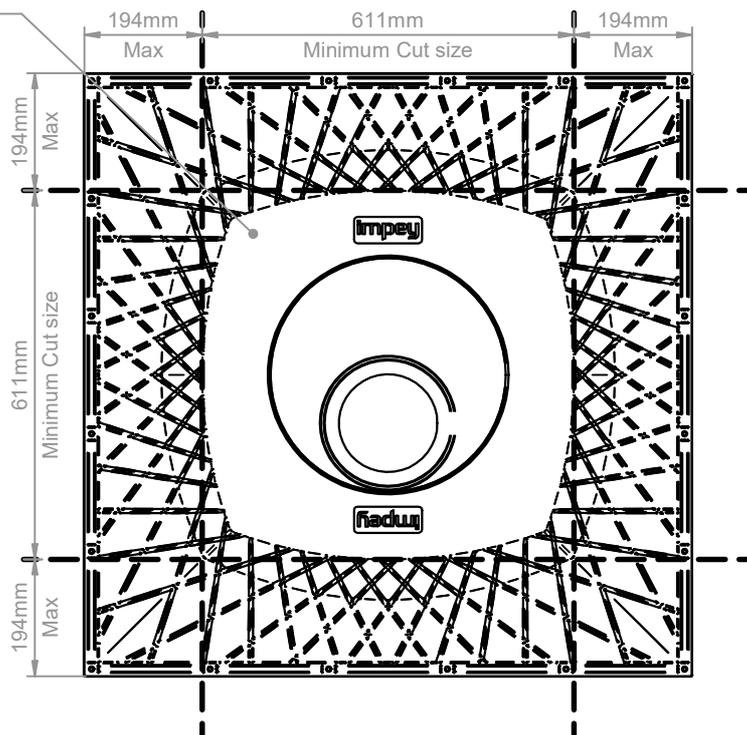


20.3 kg



Aqua-Dec Easy Fit - ADE 1212

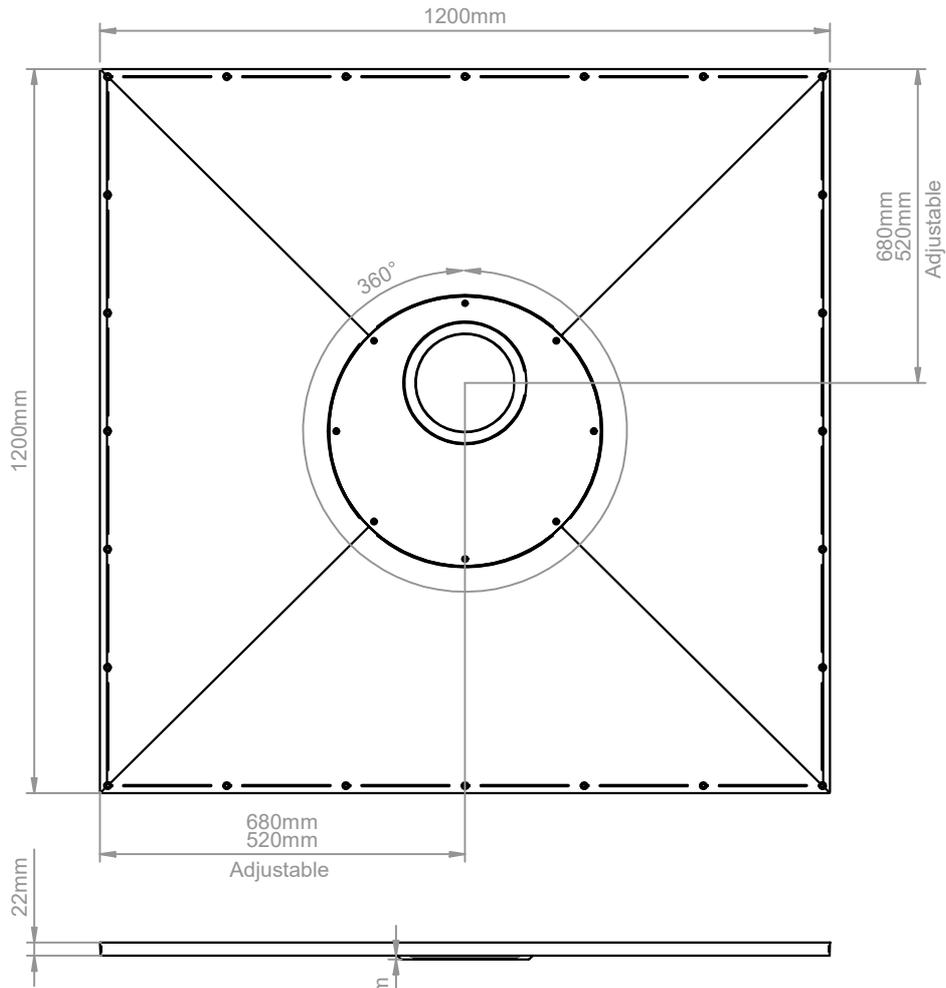


Do not cut into central solid oval section

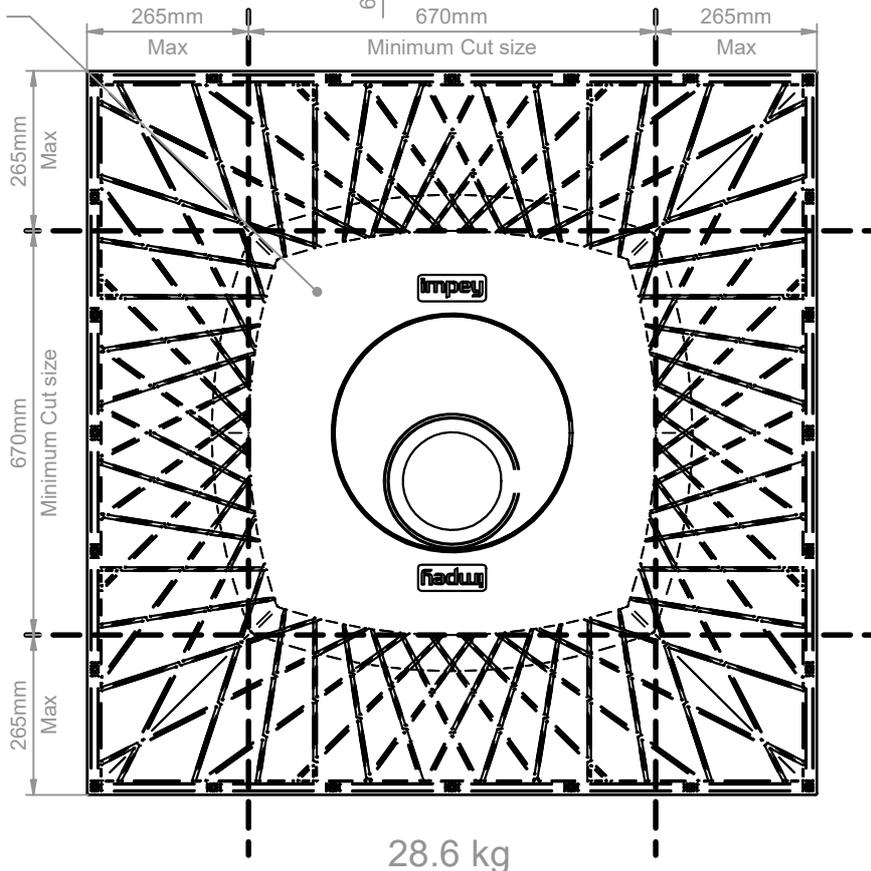

Aqua-Dec Easy Fit - ADE 1275

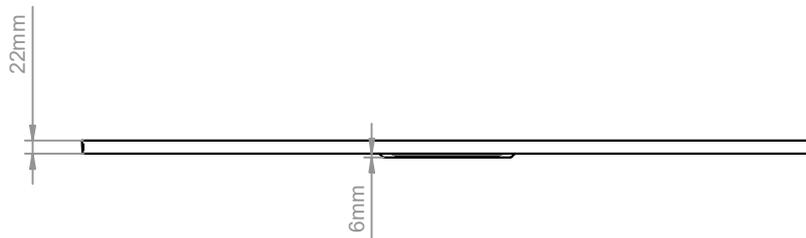
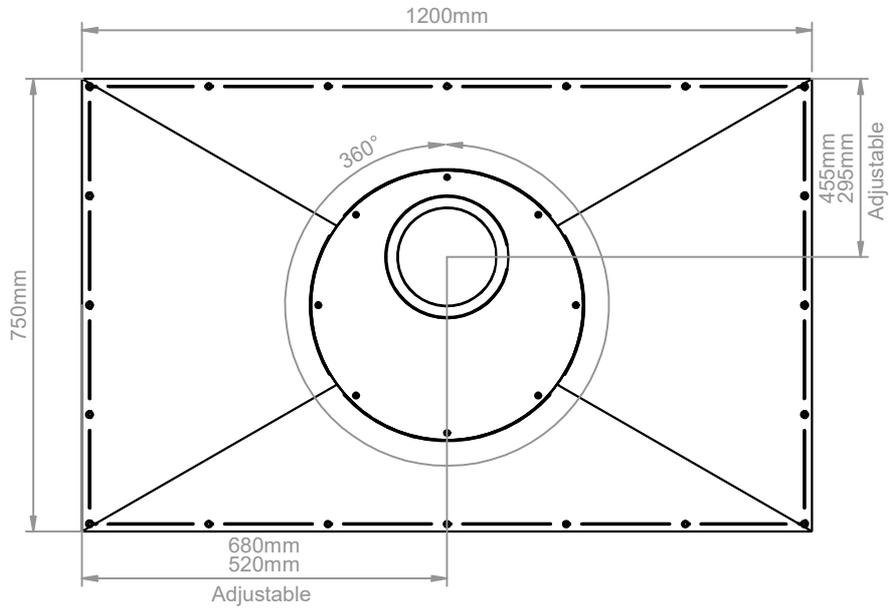


Do not cut into central solid oval section

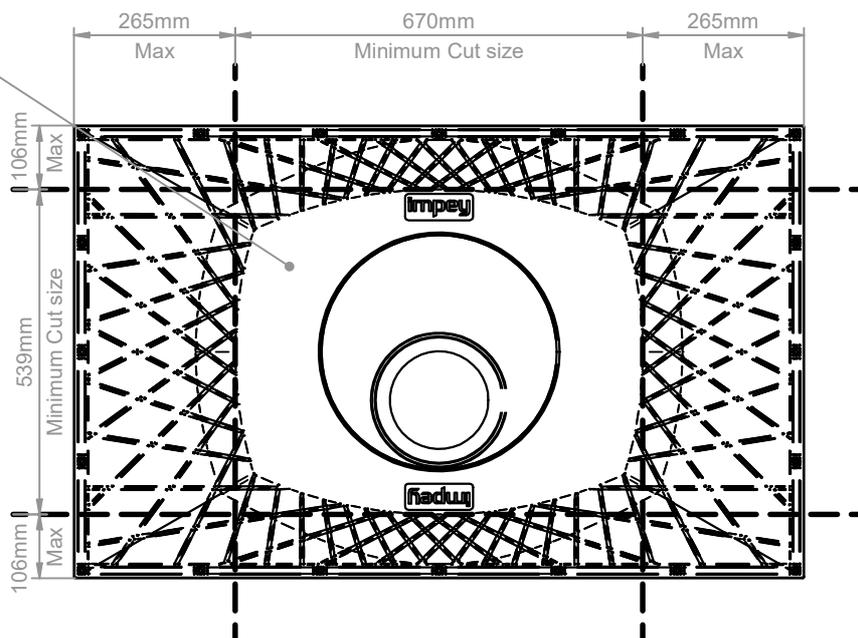




17.7 kg

Aqua-Dec Easy Fit - ADE 1290

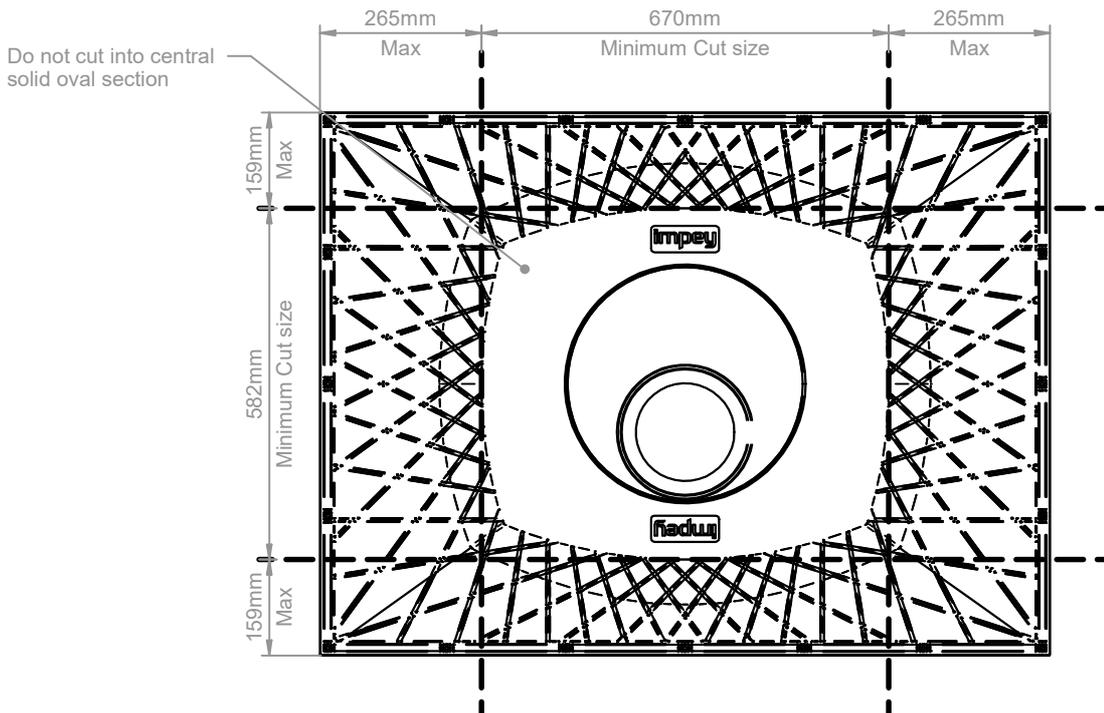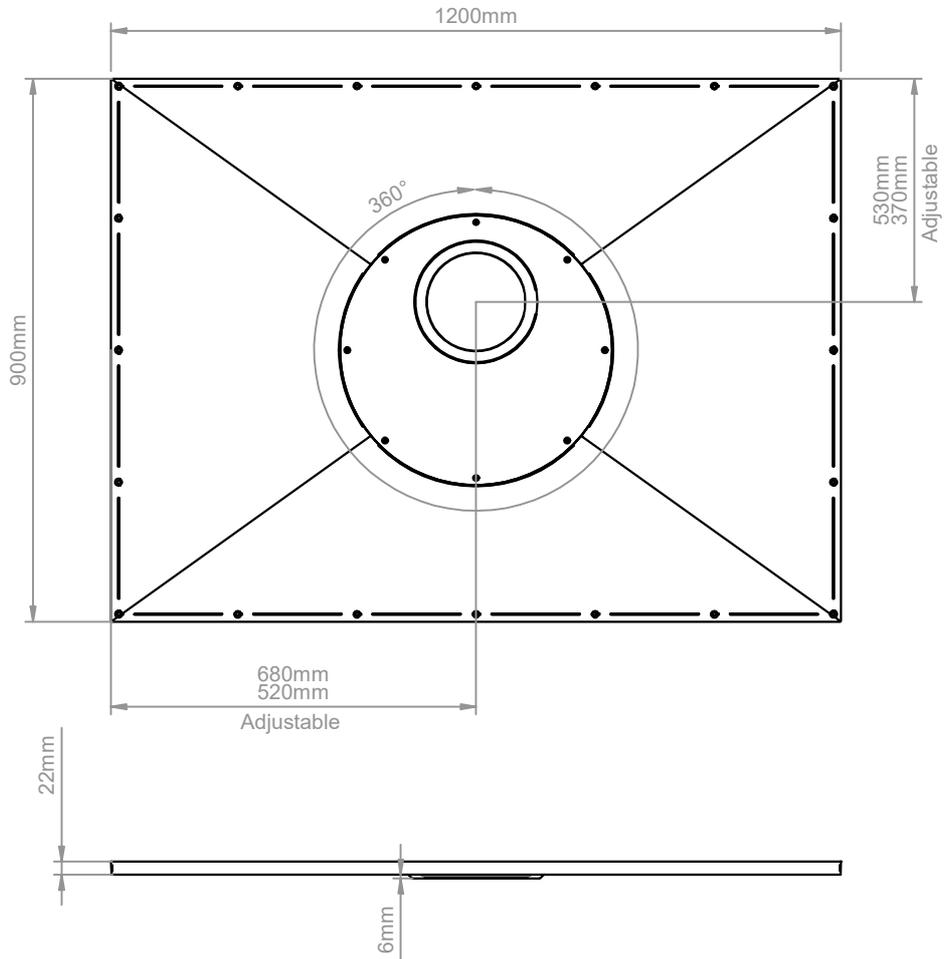


21.5 kg


Aqua-Dec Easy Fit - ADE 1380

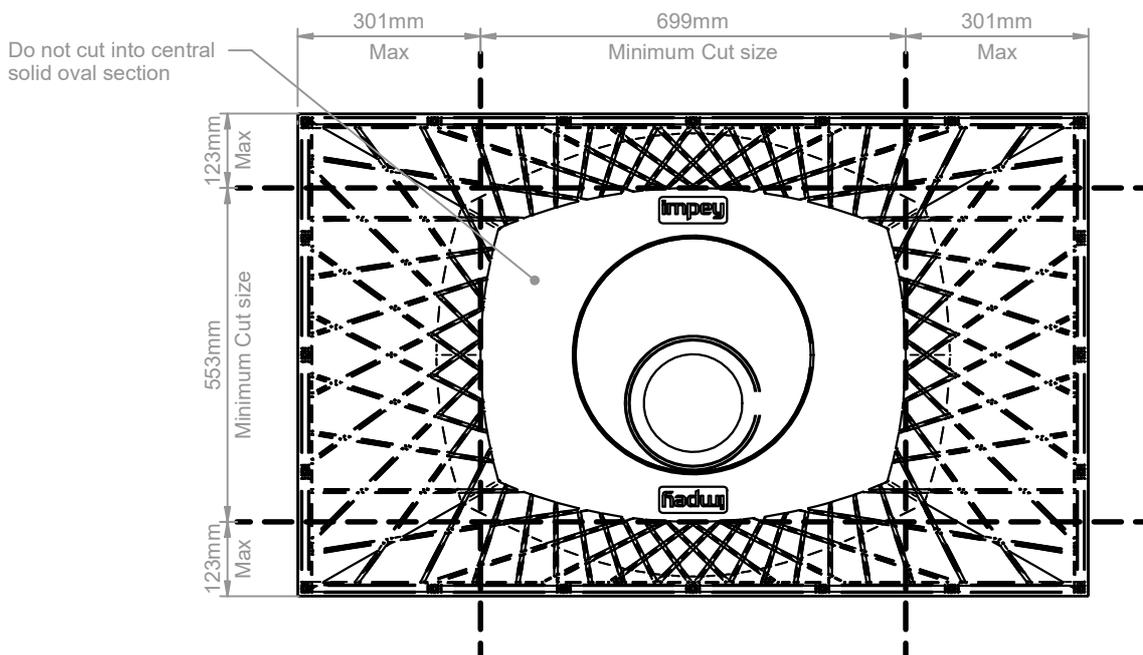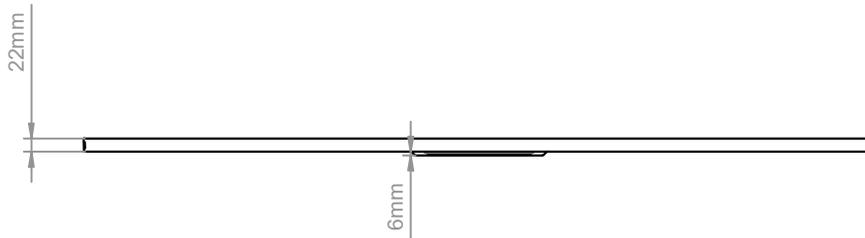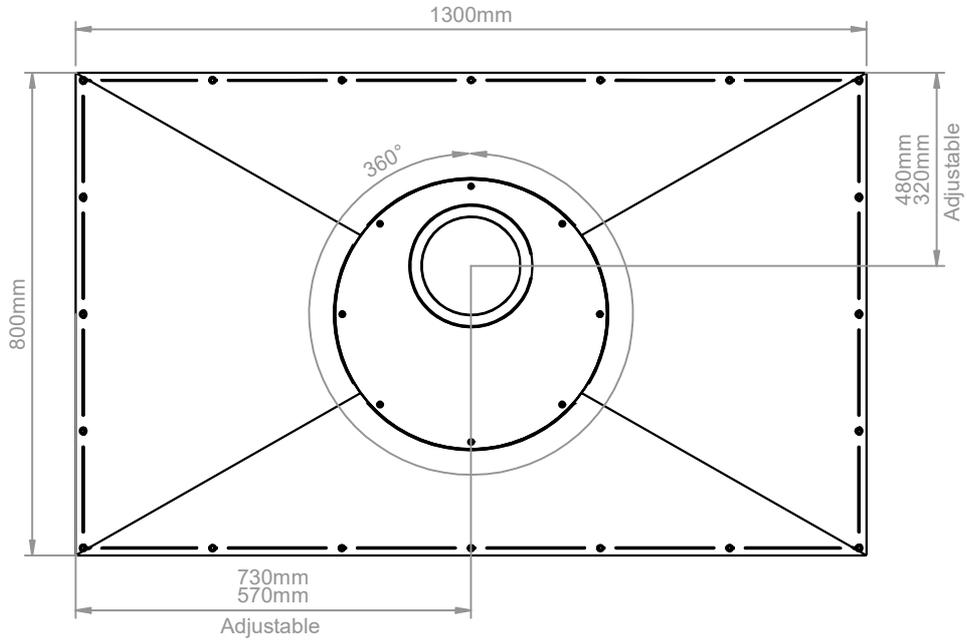




Aqua-Dec Easy Fit - ADE 1490

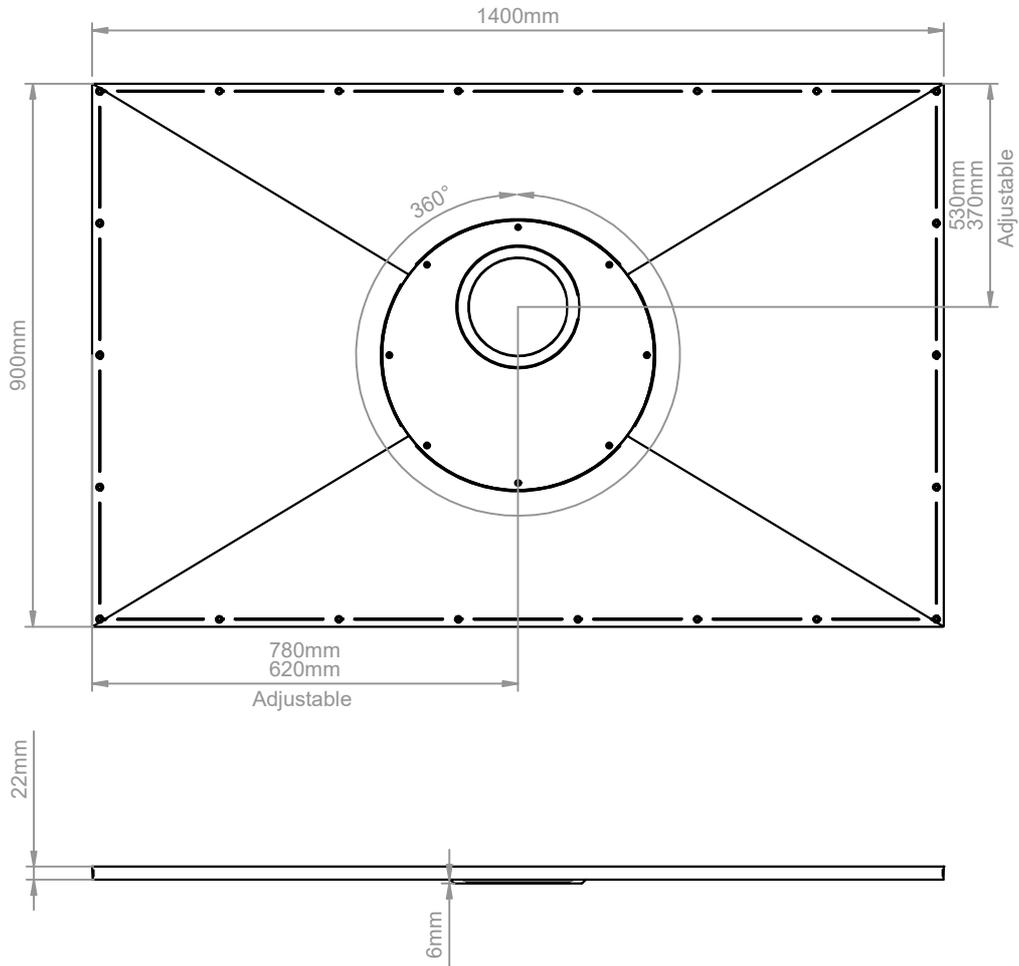

Do not cut into central solid oval section

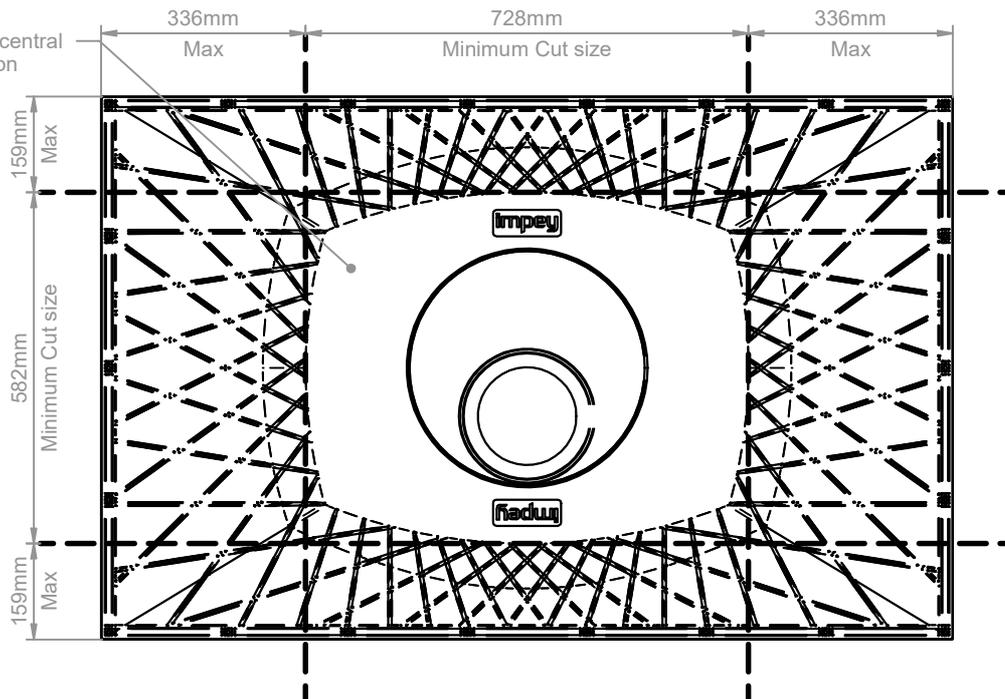


Aqua-Dec Easy Fit - ADE 1580

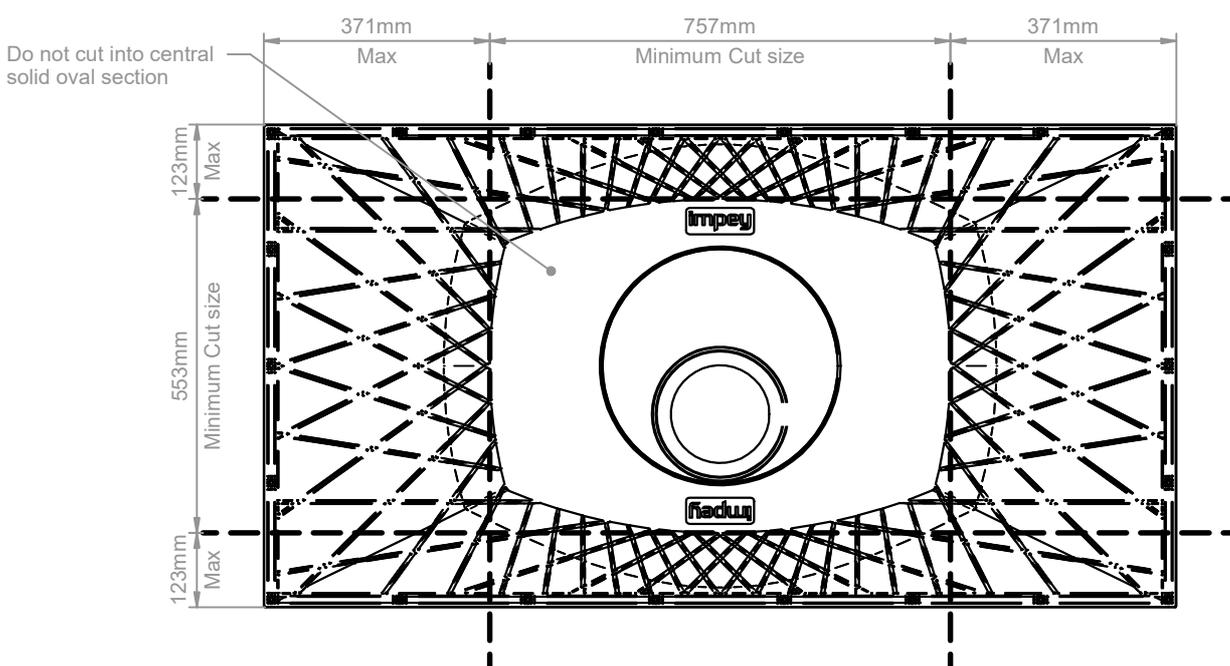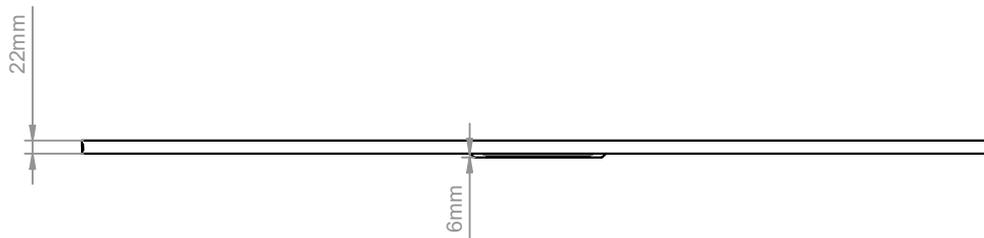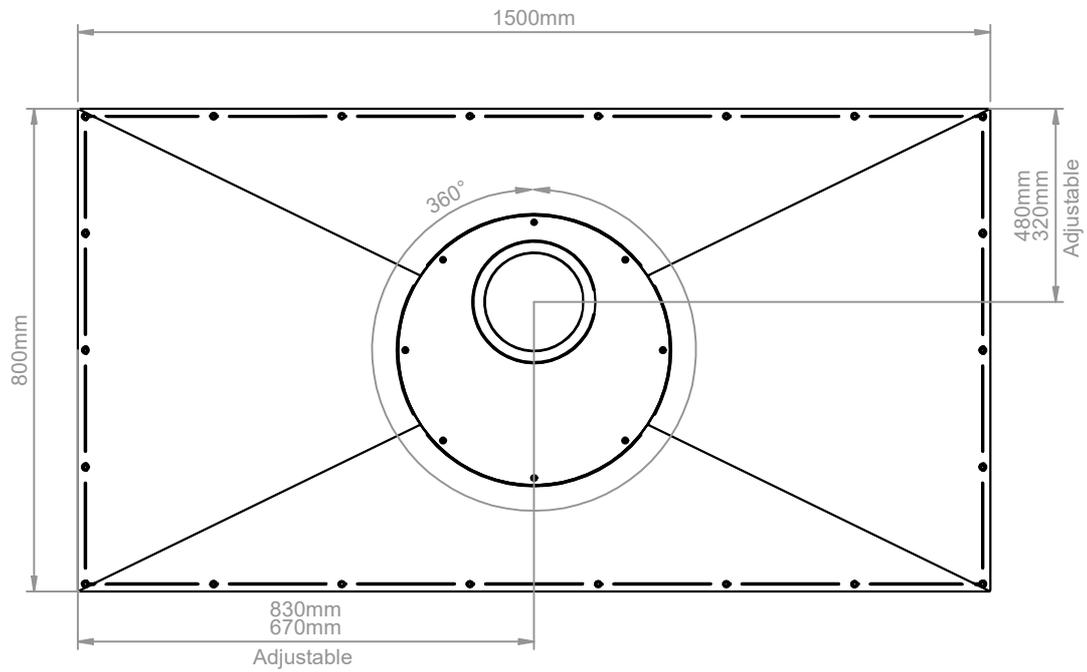


23.9 kg

Aqua-Dec Easy Fit - ADE 1512



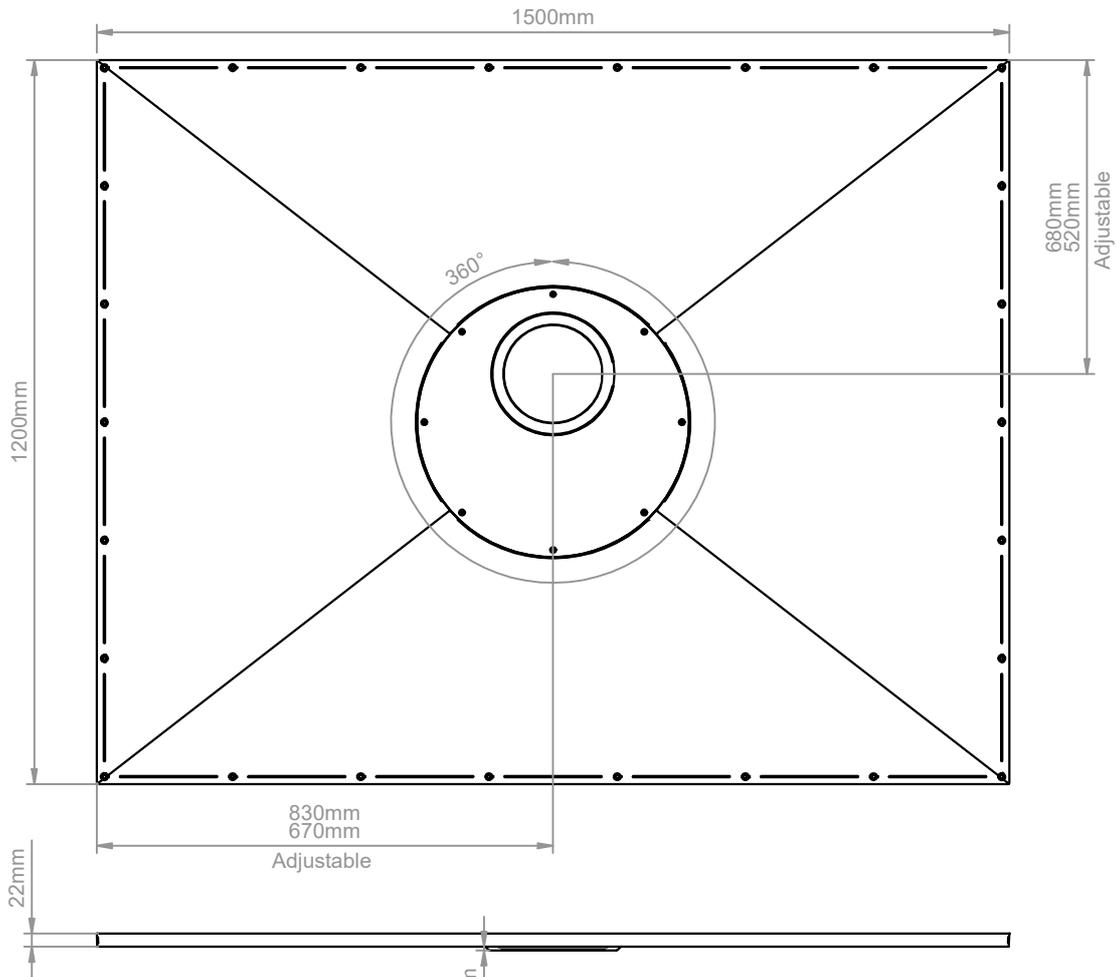


Do not cut into central solid oval section

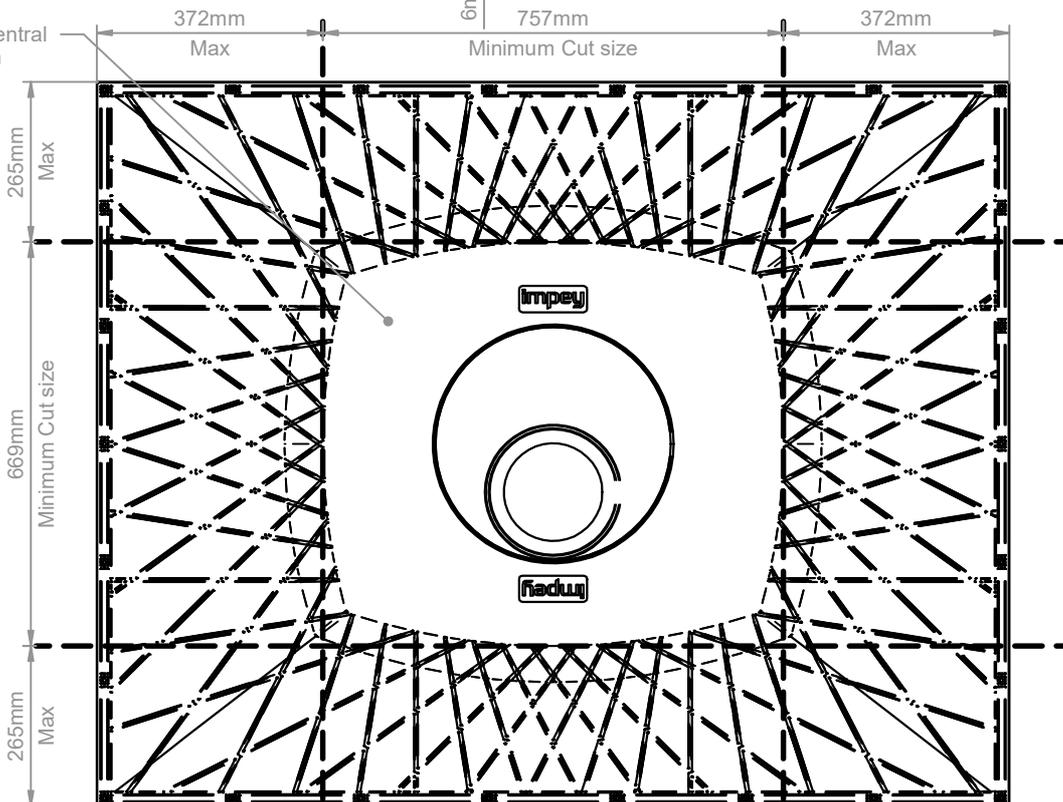

34.0 kg

Aqua-Dec Easy Fit - ADE 1775

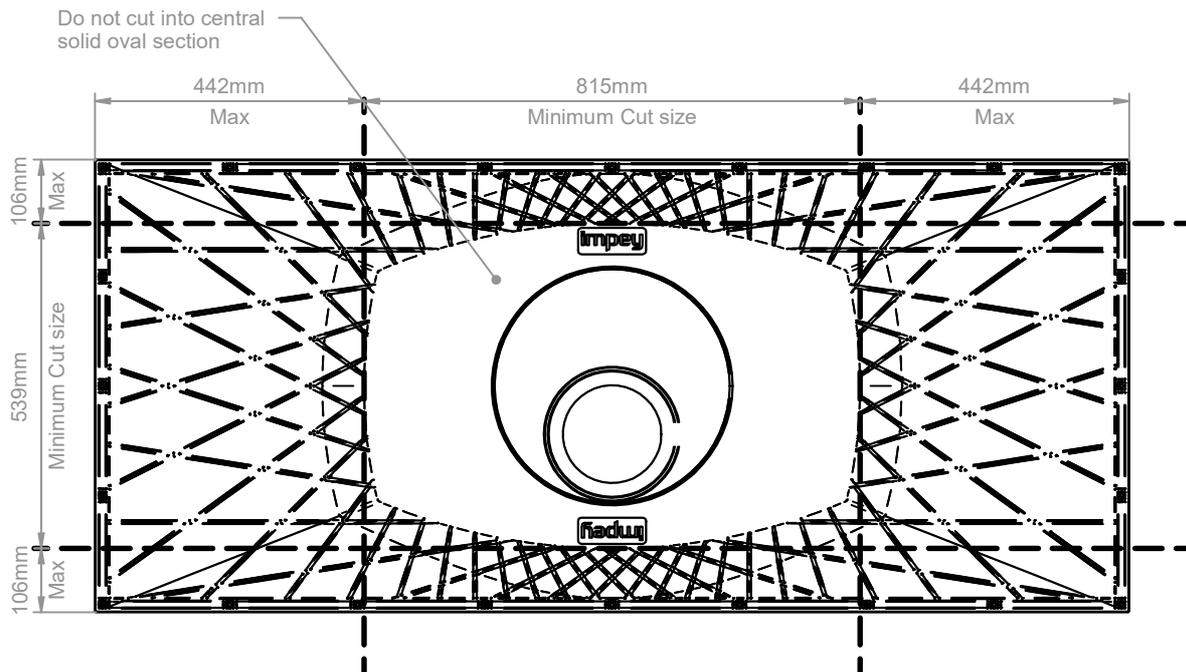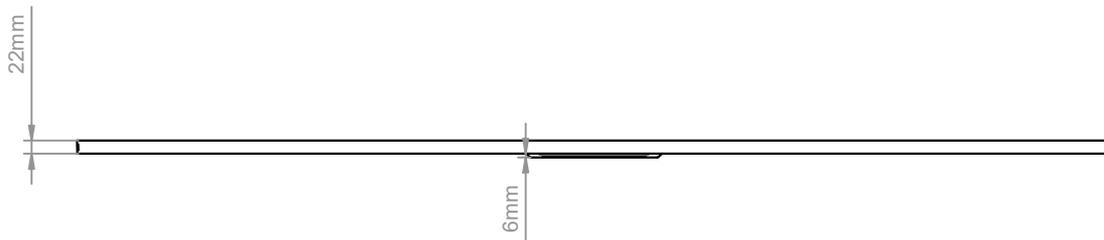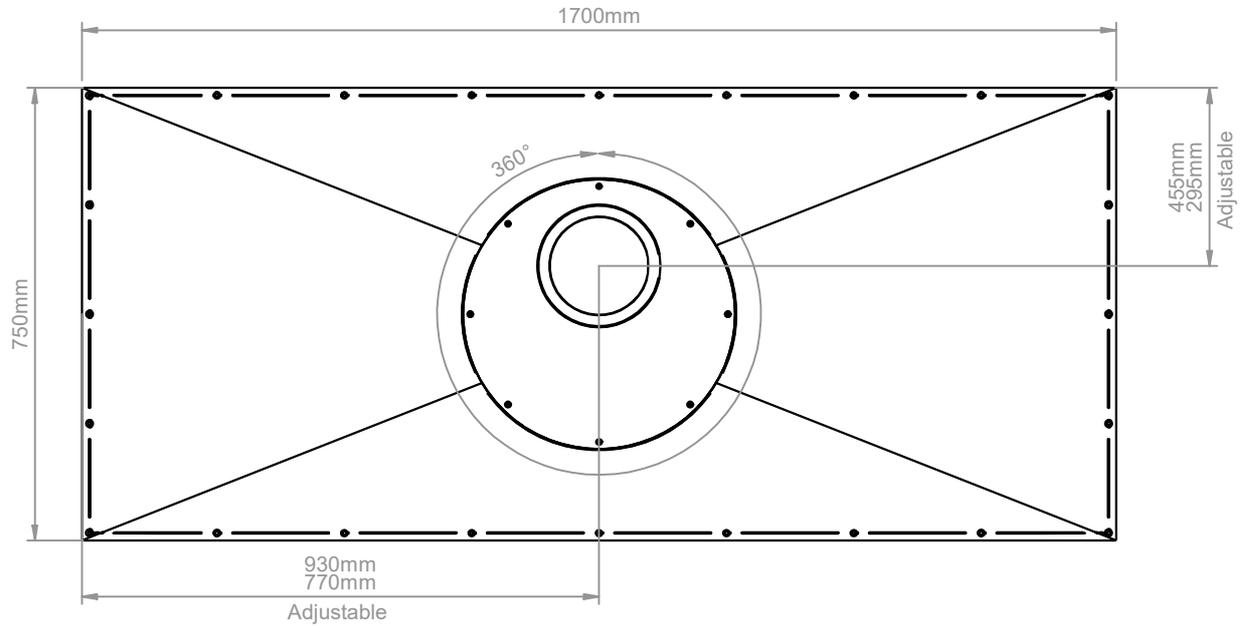

24.1 kg

Aqua-Dec Easy Fit - ADE 18590

