



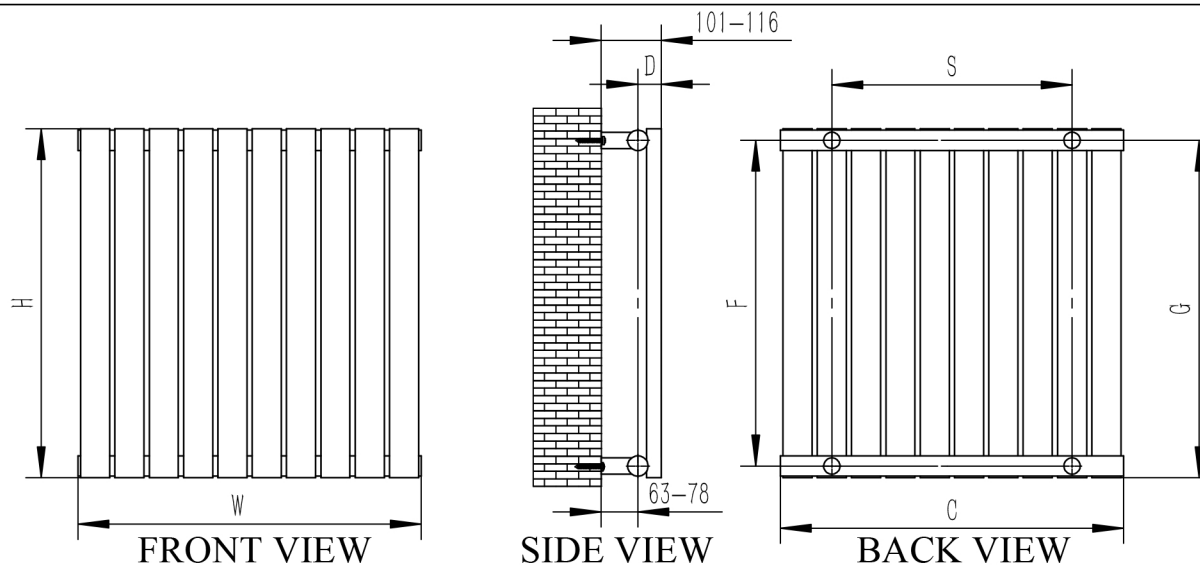

FLOX

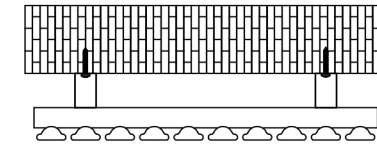

TOP VIEW

SUPPLIED INSTALLATION ACCESSORIES



ALLEN KEY 1PCS



SMALL
SCREW 4PCS



WALL PLUG 4PCS



POLOSHING
CLOTH
(Brush)1PCS



AIR VENT 1PCS



SCREW 4PCS




BUCKET 4PCS



WALL
BUCKET 4PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (FLOX RADIATOR)
- POLISHED
- MAX Operational Pressure: 10Bar
- Inlet/Outlet: 1/2"Female Pipe Thread
- All Dimensions are in mm



Product Name	Product Cude	Height	Width	Thickn ess	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight
		H	W	D	C	S	F	G	-	-
		mm	mm	mm	mm	mm	mm	mm	L	kg
	RNS-FTX180029SP	1800	295	56	295	118	1760	1780	6.45	9.1
	RNS-FTX180035SP	1800	354	56	354	177	1760	1780	7.74	10.9
	RNS-FTX180041SP	1800	413	56	413	236	1760	1780	9.03	12.7
	RNS-FTX180047SP	1800	472	56	472	295	1760	1780	10.33	14.5
	RNS-FTX180053SP	1800	531	56	531	354	1760	1780	11.62	16.3

REINA