

AR2 THLBF C

ARTISAN Tap Range Artisan Thermostatic Lever Handle Bath Filler Chrome



Features:

- Thermostatic control for bath
- Dual control - flow and temperature are controlled separately
- Pre-set maximum temperature at 38°C can be overridden by the user
- Minimum working pressure of 0.5 bar
- Can be wall mounted using WMNT10 C

Product Certifications:



WRAS Cert. Number: 1912903
WRAS Expiry Date: 31/12/2024




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|----------------------------------|
| Product Type: | Bathroom Taps |
| Main Construction Material: | Brass |
| Mount Type: | Deck Mounted |
| Handle Type: | Lever Handles |
| Connection Inlet: | G3/4" |
| Connection Outlet: | Flow Straightener |
| Number of Tap Holes: | 1 |
| Valve/Cartridge Type: | 1/4 Turn 1/2" Ceramic Disc Valve |
| Plumbing System Requirements: | Suitable for balanced systems |
| Minimum Dynamic Pressure: | 0.5 Bar |
| Maximum Dynamic Pressure: | 5.0 Bar |
| Maximum Hot Water Temperature: °C | 80 |
| Maximum Static Pressure: (bar) | 10 |
| Flow Type: | Dual Flow |
| Isolation Included: | No |

Dimensions (measurements in mm)

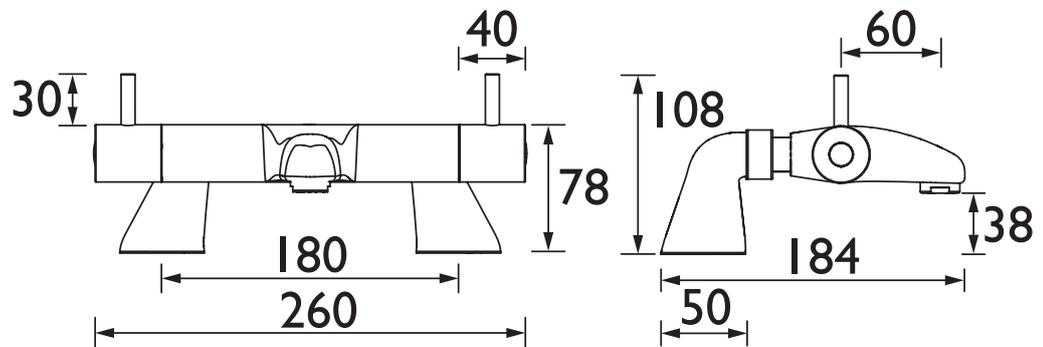

Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|------|----|------|------|----|
| AR2 THLBF C | 18.3 | 27 | 38.7 | 47.5 | 61 |

TECHNICAL
DATA
SHEET



BRISTAN

D4