

## ShowerTablet Select

### Bath thermostat 400 for exposed installation

Finish: **Matt Black** Art. no. : **24340670**



#### Description

##### product features

- rotatable bath spout
- designed to run 2 outlets
- simultaneous utilisation by 2 outlets
- temperature and volume control
- Select push button on / off control for 2 outlets
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- Maximum flow rate (at 3 bar): 18.7 l/min
- Flow rate for bath spout (at 3 bar): 18.7 l/min
- Flow rate of hand shower (at 3 bar): 15.9 l/min
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- Safety stop at 40°C
- Maximum temperature can be adjusted on installation
- with isolated water conduction
- Non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- Material handles: plastic
- shelf made of plastic
- Shelf colour: graphite
- Centre distance: 150 mm ± 12 mm
- dirt filter included
- thermostat is delivered with buttons hand shower and bath tub
- if running with a pump, please specify a universal (negative head) pump
- WRAS 2310357

#### Article Details

Price excl. VAT

£ 659.20

#### Technology



#### Design awards



reddot winner 2021



#### Certificates / Sustainability




**ShowerTablet Select**  
**Bath thermostat 400 for exposed installation**  
 Finish: **Matt Black** Art. no. : **24340670**



Product image



Scale drawing

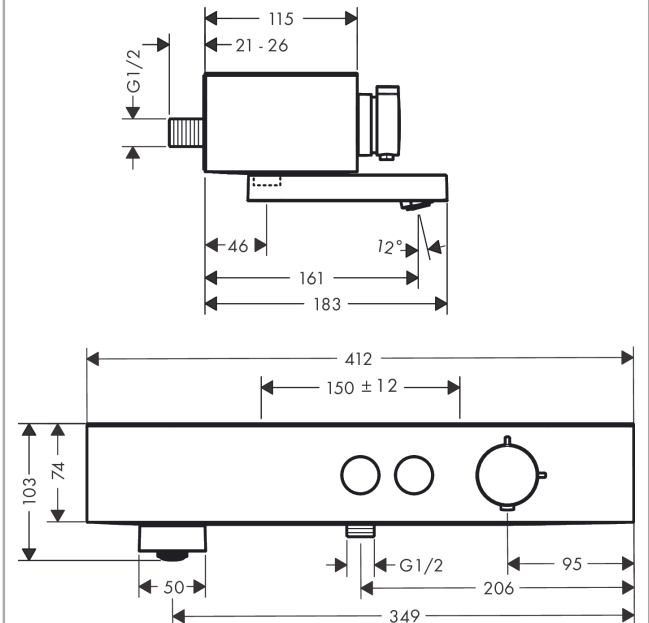


**ShowerTablet Select**  
**Bath thermostat 400 for exposed installation**  
 Finish: **Matt Black** Art. no. : **24340670**



## Exploded Drawing

Year of production: >04/22

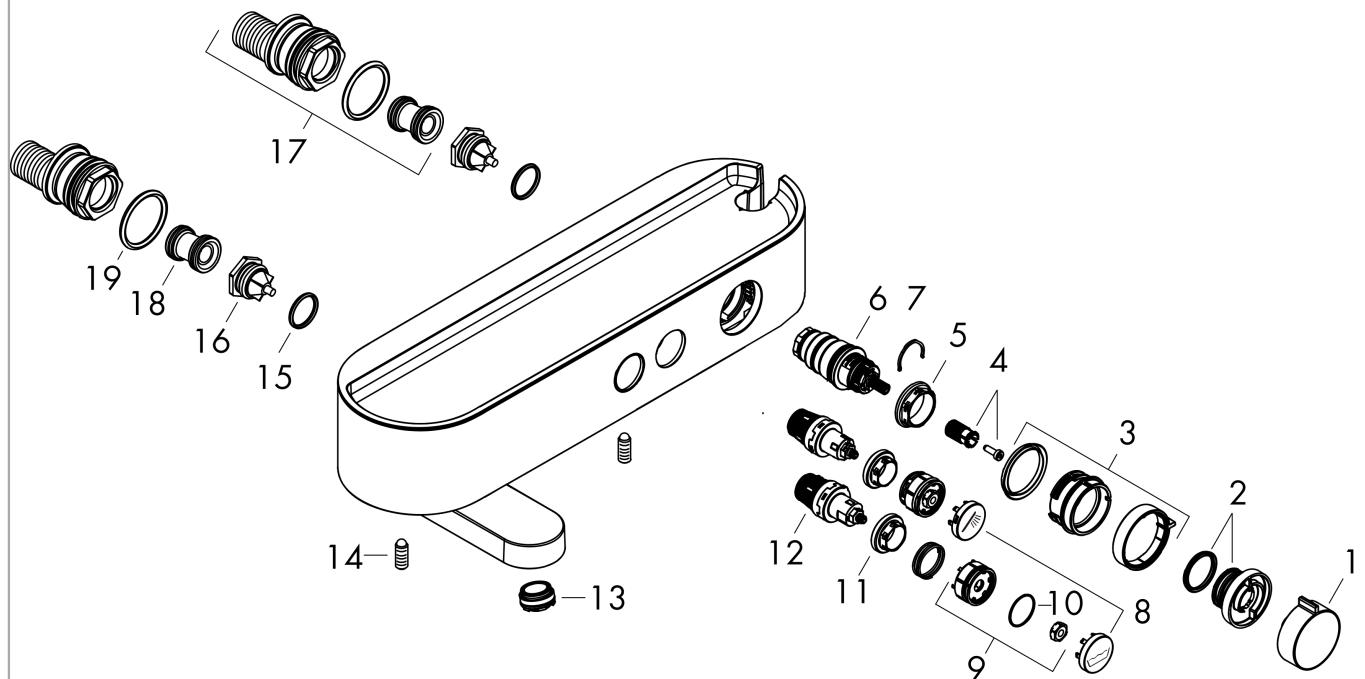

**ShowerTablet Select**  
**Bath thermostat 400 for exposed installation**  
 Finish: **Matt Black** Art. no. : **24340670**



## Spare part list

Year of production: >04/22

| Pos. | Description                                       | Art. no. | Price | PU |
|------|---|----------|-------|----|
| 1    | handle  | 94403670 | -     | 1  |
| 2    | safety set  | 94404000 | -     | 1  |
| 3    | handle  | 94405670 | -     | 1  |
| 4    | handle fixing set                                 | 92136000 | -     | 1  |
| 5    | nut   | 98913000 | -     | 1  |
| 6    | thermostat cartridge                              | 98282000 | -     | 1  |
| 7    | cartridge for exchanged connections               | 92373000 | -     | 1  |
| 8    | set of symbols                                    | 98367670 | -     | 1  |
| 9    | spring with sleeve                                | 92340000 | -     | 1  |
| 10   | O-ring 20x1                                       | 98140000 | -     | 1  |
| 11   | nut   | 98368000 | -     | 1  |
| 12   | shut off unit                                     | 95758000 | -     | 1  |
| 13   | aerator M24x1 C                                   | 92934000 | -     | 1  |
| 14   | hollow set screw M6x16 including o-ring 29x3      | 98372000 | -     | 1  |
| 15   | O-ring 17x2                                       | 98199000 | -     | 1  |
| 16   | non return valve (pressure-resistant up to 2 MPa) | 95773000 | -     | 1  |
| 17   | set of S-unions                                   | 95772000 | -     | 1  |
| 18   | noise reduction                                   | 96429000 | -     | 1  |
| 19   | O-ring 29x3                                       | 98371000 | -     | 1  |